



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>7</sup> : <b>H04L 29/06, 12/28</b>		A1	(11) International Publication Number: <b>WO 00/16531</b>
			(43) International Publication Date: 23 March 2000 (23.03.00)
(21) International Application Number: PCT/US99/19138 (22) International Filing Date: 24 August 1999 (24.08.99) (30) Priority Data: 09/151,373                      10 September 1998 (10.09.98)      US (71) Applicant: SONY ELECTRONICS, INC. [US/US]; 1 Sony Drive, Park Ridge, NJ 07656 (US). (72) Inventor: LUDTKE, Harold, Aaron; 5876 Ettersberg Drive, San Jose, CA 95123 (US). (74) Agents: GALLENSON, Mavis, S. et al.; Ladas & Parry, Suite 2100, 5670 Wilshire Boulevard, Los Angeles, CA 90036-5679 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: A METHOD AND SYSTEM FOR ELECTRONIC COMMUNICATION

## (57) Abstract

A method and system for defining and discovering proxy functionality on a distributed audio video network. The present invention operates within a network of consumer electronic media devices (e.g., television, set-top-box, video cassette recorder, compact disc device, personal computer system, etc.) that are coupled together using the IEEE 1394 serial communication standard. Specifically, the present invention enables a consumer electronic media device having increased functionality to act as a proxy device for other consumer electronic media devices. As such, the proxy device is able to provide a wide variety of advantageous proxy services for other

consumer electronic media devices thereby increasing their original capabilities. For instance, the proxy device can act as a translator between two devices thereby enabling them to communicate. Additionally, the proxy device can enable Home Audio Video Interoperability (HAVi) devices to have greater control over non-HAVi devices. Moreover, the proxy device can extend the existing functionality of devices as well as provide new functionality for them. Furthermore, the proxy device can act as a command arbitrator for particular devices. Also, the proxy device can act as a proxy for all or a portion of the functionality of a device. It is appreciated that these are only examples of the possible advantageous proxy services that the proxy device can provide for other devices in accordance with the present invention.

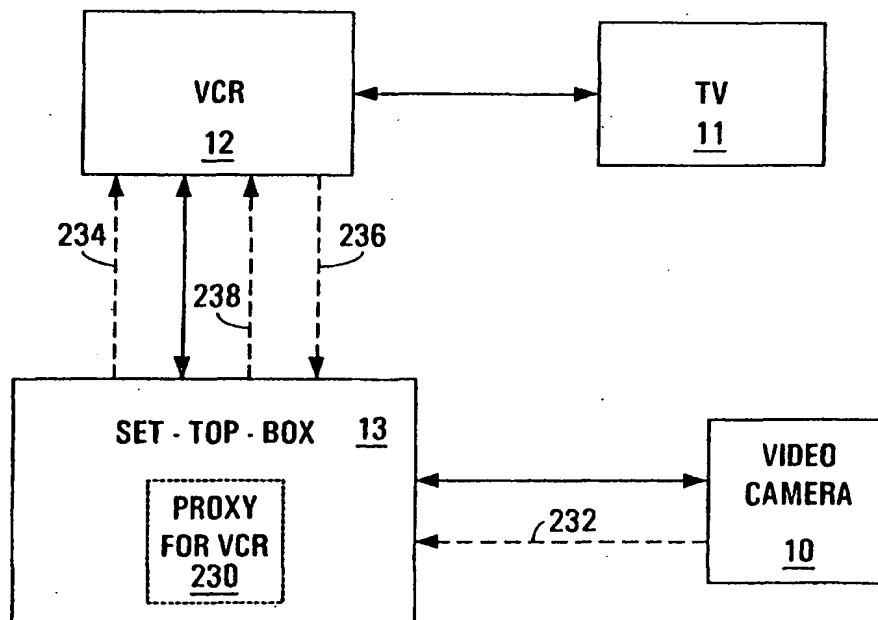

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## A METHOD AND SYSTEM FOR ELECTRONIC COMMUNICATION

5

TECHNICAL FIELD

The present invention relates to the field of consumer electronic devices. More specifically, the present invention relates to the field of networked consumer electronic media devices. Disclosed in this description are a method and system for defining and discovering proxy functionality on a distributed audio video network.

10

BACKGROUND ART

15

20

The typical home entertainment system consists of a variety of different consumer electronic devices which present and record audio/visual media in different ways. For instance, consumer electronic media devices include television (TV) sets, compact disc (CD) players, set-top-boxes, digital video disc (DVD) players, personal computer (PC) systems, video cameras, video cassette recorders (VCRs), and the like. Furthermore, there are several different ways to communicatively couple together these types of consumer electronic media devices.

Recently, a class of consumer electronic media devices has been introduced that can be networked together using a standard communication protocol layer (e.g., IEEE 1394 communication standard). The IEEE 1394 standard is an international standard

for implementing an inexpensive high-speed serial bus architecture which supports both asynchronous and isochronous format data transfers. The IEEE 1394 standard provides a high-speed serial bus for interconnecting digital devices thereby providing universal input/output connection. The IEEE 1394 standard defines a digital interface for applications thereby eliminating the need for an application to covert digital data to an analog form before it is transmitted across the bus. Correspondingly, a receiving application will receive digital data from the bus, not analog data and will therefore not be required to convert analog data to digital form. The IEEE 1394 standard is ideal for consumer electronics communication in part because devices can be added to or removed from the serial bus while the bus is active. If a device is so added or removed, the bus automatically reconfigures itself for transmitting data between the then existing devices. Each device on the bus is a "node" and contains its own address space.

The provision of the IEEE 1394 serial communication bus for networking consumer electronic devices has introduced a powerful new platform on which device functionality and inter-operability can be built. But there are disadvantages associated with consumer electronic media devices networked together by the IEEE 1394 serial bus. One disadvantage is that some consumer electronic media devices are unable to communicate with other devices, thereby rendering them incompatible. These communication incompatibilities arise because there are many different companies, standard bodies, and organizations utilizing the IEEE 1394 bus for varying purposes. For instance, different consumer electronic media devices can utilize different communication protocols while being compliant with the IEEE 1394 bus. As a result,

some consumer electronic media devices are unable to communicate even though they are designed to be compliant with the IEEE 1394 bus. This results in a very unpleasant experience for a customer who owns two or more consumer electronic media devices (e.g., a set-top-box and a VCR) which are unable to function together  
5 because they communicate using different protocols.

Another disadvantage associated with consumer electronic media devices networked together by the IEEE 1394 serial bus is that some existing devices are not upgradeable in the field when new technology is developed. As such, the non-  
10 upgradeable consumer electronic media devices are typically unable to benefit from the new technology, thereby limiting the overall functionality provided to their users. Furthermore, as technology for the IEEE 1394 bus continues to improve and change, the non-upgradeable consumer electronic media devices could eventually be unable to communicate with other consumer electronic media devices utilizing the IEEE 1394  
15 bus.

Furthermore, another disadvantage associated with consumer electronic media devices networked together by the 1394 serial bus is that some types of consumer electronic media devices are so limited in resources that they are unable to provide  
20 certain features or capabilities which are or later become useful or desirable to their users. This disadvantage is typically associated with consumer electronic media devices which are specifically manufactured with limited resources in order to be competitively priced for consumers. For example, an inexpensive VCR is typically only

fabricated with a minimal amount of Read Only Memory (ROM) enabling it to perform its basic functionality. As such, the VCR is unable to provide its user other desirable capabilities and functions. Therefore, consumer electronic media devices having limited resources can by their nature only provided limited functionality to their users.

5

Another disadvantage associated with consumer electronic media devices networked together by the 1394 serial bus is that some of them are accidentally manufactured with defects or "bugs" within their software. As such, the defective software inhibits the normal operation of the consumer electronic media devices according to their given set of operational specifications. Consequently, the defective consumer electronic media devices are typically returned in order to correct any defects within the software because they are not ordinarily correctable in the field. In the end, an owner of a defective consumer electronic media device typically expends time and/or money rectifying the defect.

15

Accordingly, it would be advantageous to provide a method and system that enables incompatible consumer electronic media devices networked together by the IEEE 1394 serial communication bus to communicate with each other. Furthermore, it would be advantageous to provide a method and system that enables new functionality to be provided in the field to existing consumer electronic media devices networked together by the IEEE 1394 serial communication bus. Moreover, it would be advantageous to provide a method and system that enables consumer electronic media devices manufactured with limited resources, which are networked together by

the IEEE 1394 serial communication bus, to exhibit increased functionality for their users. Additionally, it would be advantageous to provide a method and system that enables defective software utilized within consumer electronic media devices, which are networked together by the IEEE 1394 serial communication bus, to be corrected or  
5 updated in the field. The present invention provides these advantages. These and — other advantages of the present invention not specifically mentioned above will become clear within discussions of the present invention presented herein.

DISCLOSURE OF THE INVENTION

The present invention includes a method and system for defining and discovering proxy functionality on a distributed audio video network. The present invention operates within a network of consumer electronic media devices, e.g., television (TV), set-top-box, digital video disc (DVD) player, video cassette recorder (VCR), compact disc (CD) device, personal computer system (PC), video camera, etc., that are coupled together using a common communication bus, e.g., the IEEE 1394 serial communication standard. Specifically, the present invention enables a consumer electronic media device having increased functionality to act as a proxy device for other consumer electronic media devices. As such, the proxy device is able to provide a wide variety of advantageous proxy services for other consumer electronic media devices.

For instance, the proxy device can act as a translator between two devices having incompatible protocols thereby enabling them to communicate together. Additionally, the proxy device can enable Home Audio Video Interoperability (HAVi) devices to have greater control over non-HAVi devices. The proxy device can extend the existing functionality of devices as well as provide new functionality for them. Furthermore, the proxy device can act as a command arbitrator for particular devices. Also, the proxy device can act as a proxy for all or a portion of the functionality of a device. It should be appreciated that these are only an example of the possible advantageous proxy services that the proxy device can provide for other devices, in



accordance with the present invention. In this manner, the present invention enables a network of consumer electronic media devices to operate in conjunction and also to provide additional functions which are useful and/or desirable to the user.

5 More specifically, in a network of consumer electronic media devices, a method of communicating between a plurality of consumer electronic media devices, the method comprising the steps of: a) establishing a first consumer electronic media device as a proxy device for a second consumer electronic media device within the network of consumer electronic media devices, wherein the plurality of consumer  
10 electronic media devices are coupled together as a network by a common bus, wherein step a) comprises the step of storing a data structure in memory of the first consumer electronic media device, wherein the data structure defines proxy services that the first consumer electronic media device performs for the second consumer electronic media device; b) transmitting a signal to the first consumer electronic media  
15 device indicating a particular proxy service to be performed; c) the first consumer electronic media device receiving the signal; and d) in response to receiving the signal, the first consumer electronic media device performing the particular proxy service for the second consumer electronic media device.

20 Embodiments include the above and further comprising the step of e) the first consumer electronic media device transmitting resultant information to the second consumer electronic media device, the resultant information identified in the signal. Furthermore, embodiments include the method described above wherein the step a)

comprises the steps of: a1) the first consumer electronic media device discovering the second consumer electronic media device coupled to the common bus; a2) the first consumer electronic media device determining a functionality of the second consumer electronic media device; a3) the first consumer electronic media device determining whether the first consumer electronic media device can provide a proxy service to the second consumer electronic media device; and a4) if the first consumer electronic media device can provide a proxy service to the second consumer electronic media device, the first consumer electronic media device performing the step of storing the data structure in memory of the first consumer electronic media device.

10

Moreover, embodiments include the method described above wherein the step a) comprises the steps of: a1) a third consumer electronic media device examining the memory of the first consumer electronic media device to determine that the first consumer electronic media device is the proxy device for the second consumer electronic media device; and a2) the third consumer electronic media device recording this information within its memory.

15

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and form a part of this specification, illustrate embodiments of the invention and, together with the  
5 description, serve to explain the principles of the invention:

Figure 1 illustrates an exemplary networked system of consumer electronic media devices ("nodes") including a video camera, a video cassette recorder, a computer system, a set-top-box, a television, and a compact disc player.

10

Figure 2A is a block diagram illustrating components of a proxy device in accordance with the present invention.

Figure 2B is a block diagram illustrating an overview of the manner in which a  
15 first consumer electronic media device functions as a proxy device for a second consumer electronic media device in accordance with the present invention.

Figure 2C is a block diagram illustrating a first consumer electronic media device acting as a proxy device for two other consumer electronic media devices of a  
20 network in accordance with the present invention.

Figure 2D is a block diagram illustrating a first consumer electronic media device being a proxy device for a particular subunit of another consumer electronic media device in accordance with the present invention.

5        Figure 3A is a block diagram of memory space referred to as a configuration ROM, which is located within each node of the network of Figure 1.

10       Figure 3B is a block diagram representing a format in which information is stored within the configuration ROM of Figure 3A in accordance with one embodiment of the present invention.

15       Figure 3C is a block diagram representing a format for a proxy device to identify itself as a proxy to all other devices of the network of Figure 1 in accordance with one embodiment of the present invention.

20       Figure 3D is a block diagram illustrating a consumer electronic media device searching the configuration ROM of another consumer electronic media device in order to determine if it is a proxy device in accordance with one embodiment of the present invention.

Figure 4A is a flowchart illustrating one embodiment of steps implemented in accordance with the proxy functionality of the present invention.

Figure 4B is a flowchart illustrating another embodiment of steps implemented in accordance with the proxy functionality of the present invention.

Figure 5 is a flowchart illustrating steps of a process for establishing a proxy consumer electronic media device as a proxy for other consumer electronic media devices in accordance with one embodiment of the present invention.

Figure 6 is a flowchart illustrating steps of a process implemented in accordance with one embodiment of proxy translation functionality of the present invention.

Figure 7 is a flowchart illustrating steps of a process in accordance with one embodiment of the present invention for enabling a proxy consumer electronic media device to extend an existing functionality of a second consumer electronic media device within the network of Figure 1.

Figure 8 is a flowchart illustrating steps of a process in accordance with one embodiment of the present invention for enabling a proxy consumer electronic media device to provide additional functionality to a second consumer electronic media device within the network of Figure 1.

Figure 9 is a flowchart illustrating steps of a process in accordance with one embodiment of the present invention for enabling a HAVi proxy consumer electronic

media device to have more control over non-HAVi consumer electronic media devices within the network of Figure 1.

Figure 10 is a flowchart illustrating steps of a process implemented in accordance with one embodiment of the proxy arbitration functionality of the present invention.

Figure 11 is a flowchart illustrating steps of a process in accordance with one embodiment of the present invention for enabling a proxy consumer electronic media device to be a proxy for a specific functional subunit of a second consumer electronic media device within the network of Figure 1.

BEST MODE FOR CARRYING OUT THE INVENTION

In the following detailed description of the present invention, a method and system for defining and discovering proxy functionality on a distributed audio video network, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be recognized by one of ordinary skill in the art that the present invention may be practiced without these specific details or with equivalent thereof. In other instances, well known methods, procedures, components, and circuits have not been described in detail as not to unnecessarily obscure aspects of the present invention.

Some portions of the detailed descriptions which follow are presented in terms of procedures, logic blocks, processing, and other symbolic representations of operations on data bits within a consumer electronic media device. These descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. A procedure, logic block, process, etc., is herein, and generally, conceived to be a self-consistent sequence of steps or instructions leading to a desired result. The steps are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these physical manipulations take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated in a consumer electronic media device. For reasons of convenience, and with reference to common usage, these signals are referred to as

bits, values, elements, symbols, characters, terms, numbers, or the like with reference to the present invention.

It should be borne in mind, however, that all of these terms are to be interpreted  
5 as referencing physical manipulations and quantities and are merely convenient labels and are to be interpreted further in view of terms commonly used in the art. Unless specifically stated otherwise as apparent from the following discussions, it is understood that throughout discussions of the present invention, discussions utilizing terms such as "processing" or "computing" or "generating" or "calculating" or  
10 "determining" or "displaying" or the like, refer to the action and processes of a consumer electronic media device, or similar electronic computing device, that manipulates and transforms data. The data is represented as physical (electronic) quantities within the consumer electronic media device's registers and memories and is transformed into other data similarly represented as physical quantities within the  
15 consumer electronic media device memories or registers or other such information storage, transmission, or display screens.

The present invention includes a method and system for defining and discovering proxy functionality on a distributed audio video network. The present  
20 invention operates within a network of consumer electronic media devices, e.g., television (TV), set-top-box, digital video disc (DVD) player, video cassette recorder (VCR), compact disc (CD) device, personal computer system (PC), video camera, etc., that are coupled together using the IEEE 1394 serial communication standard.



Specifically, the present invention enables a consumer electronic media device having increased functionality to act as a proxy device for other consumer electronic media devices. As such, the proxy device is able to provide a wide variety of advantageous proxy services for other consumer electronic media devices. For instance, the proxy device can act as a translator between two devices thereby enabling them to communicate. Additionally, the proxy device can enable Home Audio Video Interoperability (HAVi) devices to have greater control over non-HAVi devices. Moreover, the proxy device can extend the existing functionality of devices as well as provide new functionality for them. Furthermore, the proxy device can act as an arbitrator for particular devices. Also, the proxy device can act as a proxy for all or a portion of the functionality of a device. It should be appreciated that these are only a few of the advantageous proxy services that the proxy device can provide for other devices, in accordance with the present invention. In this manner, the present invention enables a network of consumer electronic media devices to operate in conjunction and also to provide additional functions which are useful and/or desirable to its user.

Figure 1 illustrates an exemplary network system 5 that can support the embodiments of the proxy functionality in accordance with the present invention. Exemplary system 5 includes consumer electronic media devices (including computer systems) as nodes but could be extended equally well to cover other electronic devices. System 5 includes a video camera 10, a video cassette recorder (VCR) 12, a computer system 14, a set-top-box 13, a television set (TV) 11, and a compact disc (CD) player 20

connected together with the network by IEEE 1394-1995 (IEEE 1394) cables 15, 16, 17, 18, and 19. The set-top-box 13 can be coupled to receive media from a cable TV system. The IEEE 1394 cable 16 couples the video camera 10 to the VCR 12 allowing the video camera 10 to send data, commands and parameters to the VCR 12 for recording (or to any other device of network 5). The IEEE 1394 cable 18 couples the VCR 12 to the computer system 14 allowing the VCR 12 to send data, commands and parameters to the computer system 14 for display (or to any other device of network 5).

The IEEE 1394 cable 15 couples the set-top-box 13 to the computer system 14. The set-top-box 13 is also coupled to the TV 11 by the cable 17. The CD player 20 is coupled to the computer system 14 by the IEEE 1394 cable 19. The configuration illustrated in Figure 1 is exemplary only and it should be apparent that an audio/video network in accordance with the present invention could include many different combinations of components. The devices within an IEEE 1394 network 5 are autonomous devices, meaning that in an IEEE 1394 network, in which a computer is one of the devices, there is no true master-slave relationship between the computer system 14 and the other devices. In fact, as described below in an exemplary embodiment of the proxy functionality of the present invention, the proxy is the set-top-box 13. In many IEEE 1394 network configurations, a computer system 14 may not be present. Even in such configurations, the devices within the network are fully capable of interacting with each other on a peer-to-peer basis. It should be recognized that data, commands and parameters can be sent between all of the devices within the IEEE 1394 network 5.

The IEEE 1394 serial bus used by system 5 of Figure 1 is a high-speed bus architecture for interconnecting digital devices thereby providing a universal input/output connection. The IEEE 1394 standard defines a digital interface for the applications  
5 thereby eliminating the need for an application to covert digital data to analog data before it is transmitted across the bus. Correspondingly, a receiving application receives digital data from the bus, not analog data, and therefore is not required to covert analog data to digital data. The cable required by the IEEE 1394 standard is very thin in size compared to other bulkier cables used to connect such devices. Devices  
10 can be added and removed from an IEEE 1394 bus while the bus is active. If a device is so added or removed, the bus automatically reconfigures itself for transmitting data between the then existing nodes. A node is considered a logical entity having a unique address on the bus structure. It is appreciated that each node provides an identification ROM, a standardized set of control registers and its own address space.

15

The IEEE 1394 communication standard within system 5 of Figure 1 supports isochronous data transfers of digital encoded information. Isochronous data transfers are real-time transfers which take place such that the time intervals between significant instances have the same duration at both the transmitting and receiving applications.  
20 Each packet of data transferred isochronously is transferred in its own time period. An example of an application for the transfer of data isochronously is from VCR 12 to TV 11 of Figure 1. The VCR 12 records images and sounds and saves the data in discrete packets. The VCR 12 then transfers each packet, representing the images and sounds

recorded over a limited time period, during that time period, for display by the TV 11.

The IEEE 1394 standard bus architecture provides multiple channels for isochronous data transfers between applications. Specifically, a six bit channel number is broadcast with the data to ensure reception by the appropriate application. This allows multiple

5 applications to simultaneously transmit isochronous data across the bus structure.

Asynchronous transfers are traditional data transfer operations which take place as soon as possible and transfer an amount of data from a source to a destination.

Proxy services or functionality of the present invention are implemented by a

10 consumer electronic media device that acts as a proxy device for one or more consumer electronic media devices. The proxy device can be any device coupled within an IEEE 1394 network configuration (e.g., system 5 of Figure 1) which operates under the direction of proxy software in accordance with the present invention.

Furthermore, the proxy device typically has increased functionality enabling it to

15 provide a variety of proxy services for other consumer electronic media devices. The functional capabilities of the proxy device defines the type of proxy services that the proxy device can provide to other consumer electronic media devices. In one embodiment of the present invention, the set-top-box 13 is an intelligent device and acts as the proxy device. In other embodiments, the computer system 14 can act as

20 the proxy device.

Figure 2A is a block diagram illustrating components of a proxy device in accordance with the present invention, and in this example it is the set-top-box 13 of

Figure 1. It should be appreciated that other consumer electronic media devices can also be proxy devices in accordance with the present invention. Set-top-box 13 includes an address/data bus 210 for communicating information, a central processor 202 coupled with the bus 210 for processing information and instructions, a readable volatile memory 204, e.g., random access memory (RAM), static RAM, dynamic RAM, etc., coupled with the bus 210 for storing information and instructions for the central processor 202 and a readable non-volatile memory 206, e.g., read only memory (ROM), programmable ROM, flash memory, EPROM, EEPROM, etc., coupled with the bus 210 for storing static information and instructions for the processor 202. Set-top-box 13 can also optionally include a data storage device 208 ("disk subsystem") such as a magnetic or optical disk and disk drive coupled with the bus 210 for storing information and instructions. In one embodiment, a display device 212 can be part of the proxy device. As shown in Figure 2A, the display device (e.g., TV 11) is external to the set-top-box 13. When incorporated into the proxy device, the display device 212 can be a display screen (e.g., flat panel or cathode ray tube, etc.) or it can be a liquid crystal display (LCD) panel or other suitable display device for the display of alphanumeric characters and/or graphic images.

The proxy device 13 of Figure 2A also interfaces with or includes one or more user input devices. In one embodiment, the input device can be an alphanumeric input device 214 including alphanumeric and function keys coupled to the bus 210 for communicating information and command selections to the central processor 202. Alternatively, or in addition, the proxy device 13 can interface with or include a cursor

control or cursor directing device 216 coupled to the bus 210 for communicating user input information and command selections to the central processor 202. The cursor directing device 216 can be implemented using a number of well known devices such as a mouse, a track ball, a track pad, an electronic pad and stylus, an optical tracking-  
5 device, a touch screen, etc. In addition, the user input device can also be a remote control device, e.g., a universal remote control device having a number of buttons, dials, etc., with an infra-red signal communication capability. Set-top-box 13 can also include a signal generating device 218 coupled to the bus 210 for interfacing with other networked devices over the IEEE 1394 bus.

10

The proxy device acts as a proxy on behalf of another consumer electronic media device. This particular consumer electronic media device can also include one or more components as described with respect to Figure 2A. Particularly, the target device in accordance with the present invention includes readable memory units which can  
15 include one or more ROM and/or RAM units for storing its node identification (ID), functional capabilities, protocol, and the like, which are described below.

Figure 2B is a block diagram illustrating an overview of the manner in which a first consumer electronic media device (e.g., set-top-box 13) functions as a proxy  
20 device for a second consumer electronic media device (e.g., VCR 12) in accordance with the present invention. Specifically, the set-top-box 13 is established as a proxy device for the VCR 12 within a network of consumer electronic media devices (e.g., video camera 10 and TV 11) coupled together by a common bus (e.g., the IEEE 1394

serial communication bus). The set-top-box 13 can be established as the proxy device for the VCR 12 by establishing a stored data structure 230 within the configuration ROM of a memory unit of the set-top-box 13. The data structure 230 defines proxy services that the set-top-box 13 can perform for the VCR 12.

5

As a proxy device for the VCR 12 of Figure 2B, the set-top-box 13 is responsible for performing particular proxy services for the VCR 12. One such proxy service can be operating as a command arbitrator to the VCR 12. In this instance, the video camera 10 communicates to the set-top-box 13 in order to properly command the VCR 12. For example, the video camera 10 transmits a command signal 232 to the set-top-box 13. In response to receiving command signal 232, the set-top-box 13 transmits a command signal 234 to the VCR 12. Another such proxy service that can be performed by the set-top-box 13 is to operate as a data library for the VCR 12. For instance, the VCR 12 transmits a signal 236 to the set-top-box 13 requesting particular data (e.g., an icon). In response to receiving signal 236, the set-top-box 13 transmits a signal 238 containing the requested data to the VCR 12. Therefore, the set-top-box 13 is capable of receiving signals from the VCR 12 or any other consumer electronic media devices (e.g., TV 11 and PC 14) within the network and then performing the requested proxy service for VCR 12.

20

Figure 2C is a block diagram illustrating a first consumer electronic media device (e.g., set-top-box 13) acting as a proxy device for two other consumer electronic media devices (e.g., TV 11 and VCR 12) of a network in accordance with the present

invention. Specifically, the set-top-box 13 operates in the same manner as described above with reference to Figure 2B, except it is a proxy for both the VCR 12 and the TV 11. The set-top-box 13 can be established as the proxy device for the VCR 12 and the TV 11 by establishing stored data structures 230 and 240 within the configuration ROM of a memory unit of the set-top-box 13. The data structures 230 and 240 define proxy services that the set-top-box 13 can perform for the VCR 12 and the TV 11, respectively. It should be appreciated that the proxy device in accordance with the present invention is capable of acting as a proxy for a plurality of consumer electronic media devices which are coupled together as a network by a common bus (e.g., the IEEE 1394 serial communication bus).

Figure 2D is a block diagram illustrating a first consumer electronic media device (e.g., set-top-box 13) being a proxy device for a particular (e.g., AV/C) subunit of another consumer electronic media device (e.g., VCR 12) in accordance with the present invention. Typically, within a consumer electronic media device which conforms to a particular protocol (e.g., AV/C) there are several different subunits, groupings of functionality, that can be individually addressed and controlled by another consumer electronic media device of network 5. For instance, a VCR device 12 can have three subunits, one subunit 252 for the actual VCR tape transport mechanism, another subunit 250 for the tuning functionality, and another subunit 254 for providing the user interface functionality. The set-top-box 13 is established as a proxy device for the tape transport subunit 252 of the VCR 12. The set-top-box 13 can be established as the proxy device for the tape transport subunit 252 of the VCR 12 by



establishing a stored data structure 256 within the configuration ROM of a memory unit of the set-top-box 13. The data structure 256 defines proxy services that the set-top-box 13 can perform for the tape transport subunit 252 of the VCR 12. It should be appreciated that the proxy device of the present invention is capable of acting as a proxy for a plurality of subunits located within a single consumer electronic media device which is part of a network coupled together by a common bus (e.g., the IEEE 1394 serial communication bus). It should be further appreciated that the proxy device of the present invention is also capable of acting as a proxy for a plurality of subunits located within a plurality of consumer electronic media devices coupled together as a network by a common bus.

Figure 3A is a block diagram of memory space referred to as a configuration ROM 302, which is located within each node (e.g., TV 11, VCR 12, set-top-box 13, etc.) of network 5 of Figure 1. It should be appreciated that configuration ROM 302 of the present invention is defined by the IEEE 1212 specification, which is well known by those of ordinary skill in the art and is the foundation technology of the IEEE 1394 serial bus specification. One embodiment of configuration ROM 302 is a 64 bit memory space that is divided into two different subsections. One subsection contains the upper 16 bits of address space that are used for storing the identification (ID) of a node, which includes its physical identification (phyID) 304. The other subsection within configuration ROM 302 contains the remaining 48 bits of address space that are used for storing other configuration ROM data structures 306 pertaining to the specific node, e.g., its Global Unique Identification (GUID) value. In this manner, an IEEE 1394

serial bus network of the present invention is a memory mapped bus network. It should be appreciated that a proxy data structure 330 is typically stored within the 48 bits of address space along with the other data structures 306 of configuration ROM 302, in accordance with the present invention. The proxy data structure 330 is

5 described in more detail below with reference to Figures 3C and 3D. It should be further appreciated that there are many other embodiments of the configuration ROM 302 in accordance with the present invention. For example, the configuration ROM 302 can be implemented using RAM, static RAM, dynamic RAM, programmable ROM, flash memory, EPROM, EEPROM, or any other of memory device.

10

Figure 3B is a block diagram representing a format in which information is stored within the configuration ROM 302 of Figure 3A in accordance with one embodiment of the present invention. Specifically, a data structure 320, as defined within the IEEE 1212 specification, is typically used to store individual pieces of

15 information throughout the memory space of configuration ROM 302. Furthermore, data structure 320 allows a consumer electronic media device (e.g., CD player 20) of network 5 to search the configuration ROM 302 of another consumer electronic media device (e.g., VCR 12) for its contents. Each data structure 320 is typically comprised of a tag 322, a length 324, and data 326. The tag 322 identifies the corresponding data

20 326, while the length 324 indicates the amount of bytes that correspond to data 326. By utilizing a uniform format of storing information within the configuration ROM 320 of all the nodes of network 5, each node is able to derive specific information from all the other nodes of network 5.

Figure 3C is a block diagram representing a format for a proxy device (e.g., set-top-box 13 of Figure 2A) to identify itself as a proxy to all other consumer electronic media devices of network 5 in accordance with one embodiment of the present invention. Specifically, the proxy device 13 stores specific information within its configuration ROM 320 utilizing a proxy data structure 330, which is similar to data structure 320 of Figure 3B. Each proxy data structure 330 stored within the configuration ROM 320 of proxy device 13 includes a proxy tag 332, a length 334, and a proxy identifier 336.

10

The proxy tag 332 of Figure 3C, in accordance with the present invention, is a recognizable tag to other nodes of network 5 indicating that proxy device 13 is a proxy for a particular node (e.g., VCR 12). It should be appreciated that proxy tag 332 should be defined within the IEEE 1212r specification, in accordance with the present invention. In this manner, all other consumer electronic devices that are coupled together by an IEEE 1394 serial bus will, by definition, recognize proxy tag 332 when they search the configuration ROM of proxy device 13, regardless of whatever higher level protocols (e.g., AV/C, HAVi, etc.) they support. The length 334 indicates the amount of bytes that correspond to the proxy identifier 336.

20

The proxy identifier 336 of Figure 3C contains data indicating the specific identity of the node within network 5 for which proxy device 13 is acting as a proxy. One method of identifying the specific node in accordance within the present invention

is to utilize the phyID of the node along with other IEEE 1212r data structure information. Another method of identifying the specific node in accordance within the present invention is to utilize the GUID of the node along with the node's functionality information. It should be appreciated that other information can be stored within proxy  
5 identifier 336. For instance, the proxy identifier 336 can also include data indicating a particular proxy service or services (e.g., data library, translator, arbitrator, etc.) that proxy device 13 provides for another node (e.g., VCR 12). Furthermore, the proxy identifier 336 can also include data indicating that proxy device 13 is a proxy for a particular (e.g., AV/C) subunit or subunits of another node. Moreover, the proxy  
10 identifier 336 can also include data indicating that proxy device 13 is a proxy for a particular (e.g., IEEE 1212) unit directory of another node.

Therefore, by reading the configuration ROM 320 of proxy device 13, the other nodes (devices) of network 5 within the present embodiment are able to determine that  
15 proxy device 13 is acting as a proxy for another node (e.g., VCR 12), the proxy services that the proxy device 13 provides on behalf of that node, and the particular protocol of those proxy services.

Figure 3D is a block diagram illustrating a consumer electronic media device  
20 searching the configuration ROM of another consumer electronic media device in order to determine if it is a proxy device in accordance with the present invention. Specifically, within one embodiment of the present invention, a consumer electronic media device (e.g., PC 14) searches the configuration ROM of another consumer

electronic media device (e.g., set-top-box 13) utilizing well known IEEE 1212 communication protocol mechanisms (e.g., IEEE 1212 ROM protocol) in order to determine if it is a proxy device. For instance, the PC 14 begins its search of a memory map 350 of the configuration ROM of the set-top-box 13 at a particular starting address, typically referred to as the root. The PC 14 reads tag 322 which identifies the corresponding data 326. Since the PC 14 is searching the memory map 350 for a proxy tag (e.g., 332), it reads the length 324 in order to skip data 326 and reach the next tag within the memory map 350, which happens to be proxy tag 332. It should be appreciated that if the next tag was not proxy tag 332, the PC 14 would continue its search of the memory map 350 by repeating the process described above for skipping data until the proxy tag 332 is found. Furthermore, if a proxy tag was not stored within memory map 350, the PC 14 would begin searching the configuration ROM of another consumer electronic media device that it has not searched, if there is one available within network 5.

15

Upon reaching the proxy tag 332 stored within the memory map 350 of Figure 3D, the PC 14 then reads it. The proxy tag 332 indicates that the set-top-box 13 is a proxy device for one or more consumer electronic media devices of network 5. The PC 14 then reads length 334 which indicates the amount of bytes that correspond to the proxy identifiers 336, 340, and 342. The PC 14 subsequently reads the proxy identifiers 336, 340, and 342 in order to determine the specific identities of the nodes within network 5 for which set-top-box 13 is acting as a proxy device. The PC 14 then

stores this information within its memory to be utilized in accordance with the present invention.

In the present invention, there is another method for enabling a proxy device  
5 (e.g., set-top-box 13 of Figure 2A) to identify itself as a proxy to all other consumer electronic media devices of network 5. Specifically, proxy device 13 can represent itself as a proxy for another node of network 5 within an IEEE 1212 Unit Directory structure, which is stored within one of its memory units. It should be appreciated that the IEEE 1212 Unit Directory structure is well known by those of ordinary skill in the art.  
10 Within one embodiment of the IEEE 1212 Unit Directory structure, in accordance with the present invention, is stored information indicating the identity of the node within network 5 for which proxy device 13 is acting as a proxy, the proxy services or capabilities it provides on behalf of that node, and the protocol of the particular proxy services. It should be further appreciated that the identity of the node can be specified  
15 using any of the methods described above or by using the GUID of the node along with a unique identifier of the unit directory within that node. The identifying reference of the node is stored within the unit directory of proxy device 13.

Figure 4A is a flowchart illustrating steps of a process 400 implemented in  
20 accordance with one embodiment of the proxy functionality of the present invention. Process 400 is realized as program code stored within computer readable memory units of a proxy consumer electronic media device and a second consumer electronic media device of network 5. Process 400 begins at step 402 and at step 404, the proxy

device (e.g., set-top-box 13) establishes itself as a proxy for a second consumer electronic media device (e.g., VCR 12). One embodiment of step 404, in accordance with the present invention, is described below with reference to Figure 5. At step 406, a third consumer electronic media device (e.g., PC 14) determines that the proxy device is acting as a proxy for the second consumer electronic media device. It should be appreciated that the third consumer electronic media device understands the functionality of the proxy device in accordance with the present invention. One embodiment of step 406 in accordance with the present invention can be performed by the third consumer electronic media device reading the configuration ROM located within the proxy device. Another embodiment of step 406 in accordance with the present invention can be performed by the third consumer electronic media device utilizing an IEEE 1212 Unit Directory structure which is stored within the proxy device.

At step 408, the third consumer electronic media device transmits a signal to the proxy device indicating a particular proxy service to be performed by the proxy device. At step 410, the proxy device receives the signal from the third consumer electronic media device and performs the requested proxy service, which may include returning information/results to the third consumer electronic media device. At step 410, some of the proxy services which can be performed by the proxy device include providing a data library, being a translator, being an arbitrator, providing additional functionality to the second consumer electronic media device, and extending existing functionality of the second consumer electronic media device. It should be appreciated that the proxy services which the proxy device can perform in accordance with the present invention

are not limited to the proxy services listed above. As such, the proxy device can perform many other proxy services, in accordance with the present invention, which have not been mentioned. After the completion of step 410, process 400 returns to step 408.

5

Figure 4B is a flowchart illustrating steps of a process 450 implemented in accordance with the proxy functionality of the present invention. Process 450 is realized as program code stored within computer readable memory units of a proxy consumer electronic media device and a second consumer electronic media device of network 5. Process 450 is similar to process 400 of Figure 4A, except for the addition of step 452. After the completion of step 410, process 450 proceeds to step 452. At step 452, the proxy device transmits the resultant information of the performed proxy service to the second consumer electronic media device. For instance, after the proxy device translates a received command from one language to another language, the resulting command is then transmitted to the second consumer electronic media device.

Figure 5 is a flowchart illustrating steps of a process 500 for establishing a proxy consumer electronic media device as a proxy for other consumer electronic media devices in accordance with one embodiment of the present invention. It should be appreciated that process 500 is one embodiment of step 404 of Figures 4A and 4B, in accordance with the present invention. Process 500 is realized as program code stored within computer readable memory units of a proxy consumer electronic media



device and other consumer electronic media devices of network 5. Process 500 begins at step 502 and at step 504, the proxy device discovers a consumer electronic media device which is coupled to the IEEE 1394 serial bus. This process utilizes well known IEEE 1394 communication protocol mechanisms. At step 506, the proxy device  
5 determines the functional capabilities of the located consumer electronic media device. One method in accordance with the present invention for the proxy device to perform step 506 is to read all of the configuration ROM within the located consumer electronic media device, which is a well known IEEE 1212 communication protocol mechanism.

10

At step 508 of Figure 5, the proxy device determines whether it can perform a proxy service in behalf of the located consumer electronic media device. One method in accordance with the present invention for the proxy device to perform step 508 is to first compare all its capabilities with the capabilities of the located consumer electronic  
15 media device. If any of the relevant capabilities of the proxy device are not performed by the located consumer electronic media device, the proxy device decides to implement them. At step 508, if the proxy device determines that it cannot perform a proxy service in behalf of the located consumer electronic media device, process 500 proceeds to step 512, which is described in detail below. If the proxy device  
20 determines at step 508 that it can perform a proxy service in behalf of the located consumer electronic media device, process 500 proceeds to step 510.

At step 510, the proxy device stores a data structure within its memory unit identifying itself as a proxy for the located consumer electronic media device. It should be appreciated that there are different methods in accordance with the present invention for the proxy device to perform step 510. For instance, within one method  
5 the proxy device identifies itself as a proxy within its configuration ROM, as described above. Furthermore, within another method the proxy device represents itself as a proxy within an IEEE 1212 Unit Directory structure, as described above.

At step 512 of Figure 5, the proxy device determines if there is another  
10 consumer electronic media device coupled to the IEEE 1394 serial bus. This process utilizes well known IEEE 1394 communication protocol mechanisms. At step 512, if the proxy device detects another consumer electronic media device coupled to the IEEE 1394 serial bus, process 500 returns to step 506. If the proxy device does not detect any other consumer electronic media device coupled to the IEEE 1394 serial  
15 bus at step 512, process 500 proceeds to step 514. Process 500 is exited at step 514.

There are several kinds of proxy services in accordance with the present invention which could be provided by a proxy device on behalf of another consumer electronic media device. One proxy service includes the proxy device acting as a  
20 translator between two consumer electronic media devices having incompatible protocols thereby enabling them to communicate together. For instance, two consumer electronic media devices which share the same command protocol, e.g., Audio Video Control (AV/C), may not share the same command transport protocol.

Currently, Function Control Protocol (FCP) is the only command transport protocol defined to carry AV/C. However, it is quite possible for Serial Bus Protocol 2 (SBP2) to carry AV/C commands as well. A proxy device is able to translate between the two transport protocols allowing the two consumer electronic media devices to operate  
5 together. Furthermore, the proxy device can also perform other translation services beyond transport protocol translation. The proxy device can translate from one graphics format to another for user interface data such as device icons, text string formats translations, and the like.

10 Figure 6 is a flowchart illustrating steps of a process 600 implemented in accordance with one embodiment of the proxy translation functionality of the present invention. Specifically, process 600 enables a proxy consumer electronic media device to perform translation on communication between two other consumer electronic media devices. Process 600 is realized as program code stored within  
15 computer readable memory units of a proxy consumer electronic media device, a second and third consumer electronic media devices of network 5. Process 600 begins at step 602 and at step 604, the proxy device (e.g., set-top-box 13) establishes itself as a proxy translator for a second consumer electronic media device (e.g., VCR 12). It should be appreciated that one method of accomplishing step 604 in  
20 accordance with the present invention is to utilize process 500 of Figure 5. Furthermore, another method of accomplishing step 604 in accordance with the present invention is to utilize any of the methods described above.

At step 606, a third consumer electronic media device (e.g., PC 14) discovers that the proxy device is a proxy translator for the second consumer electronic media device. This process utilizes well known IEEE 1212 communication protocol mechanisms along with methods of the present invention described above. It should  
5 be appreciated that the third consumer electronic media device understands the functionality of the proxy device in accordance with the present invention. At step 608, the third consumer electronic media device transmits a command of a first protocol, e.g., Audio Video Control (AV/C), to the proxy device.

10 At step 610 of Figure 6, the proxy device receives the first protocol command from the third consumer electronic media device and then translates it into a command of a second protocol, e.g., Common Application Language (CAL). At step 612, the proxy device transmits the second protocol command to the second consumer electronic media device. At step 614, the second consumer electronic media device  
15 receives the second protocol command from the proxy device and then performs the second protocol command. At step 616, the proxy device returns information/results to the third consumer electronic media device with regard to the issued command. Process 600 is exited at step 618.

20 It should be appreciated that during process 600 of Figure 6, the proxy device is capable of translating many different types of signals in accordance with the present invention. For instance, the proxy device can translate between different: command

languages, command transport protocols, graphics formats, text string formats, and the like.

Another proxy services in accordance with the present invention includes the—  
5 proxy device extending the existing functionality of other consumer electronic media devices. For instance, consider AV/C subunits within a consumer electronic media device which support the NOTIFY ctype for certain commands. They may be implemented with the ability to notify only one other consumer electronic media device (client) on network 5. However, a device such as set-top-box 13, with more RAM and  
10 other resources, is able to register itself as the NOTIFY target, and several other clients could register with the proxy device. In effect, the proxy device is extending the functionality of the AV/C subunit's existing NOTIFY mechanism.

Figure 7 is a flowchart illustrating steps of a process 700 in accordance with one  
15 embodiment of the present invention for enabling a proxy consumer electronic media device to extend an existing functionality of a second consumer electronic media device within network 5. Specifically, process 700 extends the capability of the second consumer electronic media device to transmit a NOTIFY signal, which is part of the AV/C protocol. But it should be appreciated that a proxy device, in accordance  
20 with the present invention, is capable of extending any number of functions of a second consumer electronic media device. Furthermore, the proxy device, in accordance with the present invention, is capable of extending the functions of numerous consumer electronic media devices within network 5. Process 700 is

realized as program code stored within computer readable memory units of a proxy consumer electronic media device, a second, third and fourth consumer electronic media devices of network 5. Process 700 begins at step 702 and at step 704, the proxy device (e.g., set-top-box 13) establishes itself as a proxy for transmitting multiple  
5 NOTIFY signals of the AV/C protocol for a second consumer electronic media device (e.g., VCR 12). It should be appreciated that one method of accomplishing step 704 in accordance with the present invention is to utilize process 500 of Figure 5.

Furthermore, another method of accomplishing step 704 in accordance with the present invention is to utilize any of the methods described above.

10

At step 706, a third and fourth consumer electronic media devices (e.g., TV 11 and PC 14) each discover that the proxy device is a proxy for the AV/C NOTIFY signal of the second consumer electronic media device. This process utilizes well known IEEE 1212 communication protocol mechanisms along with methods of the present  
15 invention described above. It should be appreciated that the third and the fourth consumer electronic media devices understand the functionality of the proxy device in accordance with the present invention. At step 708, the third and fourth consumer electronic media devices each register with the proxy device in order to receive a NOTIFY signal corresponding to the second consumer electronic media device. At  
20 step 710, the proxy device stores within its memory unit the registration of the third and fourth consumer electronic media devices.

At step 712 of Figure 7, the second consumer electronic media device transmits a NOTIFY signal to the proxy device. At step 714, the proxy device receives the NOTIFY signal from the second consumer electronic media device and then transmits a NOTIFY signal to both the third and fourth consumer electronic media devices. —

5 Process 700 is exited at step 716.

Another proxy service in accordance with the present invention includes the proxy device providing new functionality to other consumer electronic media devices. For instance, within IEEE 1212r several new and interesting user interface elements  
10 and other mechanisms such as remote driver discovery are being defined. For legacy devices (pre-IEEE 1212r), a proxy device is able to supply some of these elements or services. Moreover, for compliant IEEE 1212r consumer electronic media devices that can only provide limited data, the proxy device can provide additional and "higher quality" data.

15

Figure 8 is a flowchart illustrating steps of a process 800 in accordance with one embodiment of the present invention for enabling a proxy consumer electronic media device to provide additional functionality to a second consumer electronic media device within network 5. Specifically, process 800 provides a data library for the  
20 second consumer electronic media device. In other words, the data library provided by the proxy device includes information that cannot otherwise be retrieved from the second consumer electronic media device for various reasons. For example, the information was unable to be stored within the limited memory space of the second

consumer electronic media device. Furthermore, the information stored within the memory space of the second consumer electronic media device is antiquated. It should be appreciated that a proxy device, in accordance with the present invention, is capable of providing any number of additional functions to a second consumer  
5 electronic media device. Furthermore, the proxy device, in accordance with the present invention, is capable of providing additional functions to numerous consumer electronic media devices within network 5.

Process 800 of Figure 8 is realized as program code stored within computer  
10 readable memory units of a proxy consumer electronic media device, a second and third consumer electronic media devices of network 5. Process 800 begins at step 802 and at step 804, the proxy device (e.g., set-top-box 13) establishes itself as a proxy data library for a second consumer electronic media device (e.g., VCR 12). It should be appreciated that one method of accomplishing step 804 in accordance with the  
15 present invention is to utilize process 500 of Figure 5. Furthermore, another method of accomplishing step 804 in accordance with the present invention is to utilize any of the methods described above.

At step 806 of Figure 8, a third consumer electronic media device (e.g., PC 14)  
20 discovers that the proxy device is a proxy data library for the second consumer electronic media device. This process utilizes well known IEEE 1212 communication protocol mechanisms along with methods of the present invention described above. It should be appreciated that the third consumer electronic media device understands



the functionality of the proxy device in accordance with the present invention. At step 808, the third consumer electronic media device transmits a request signal to the proxy device for an icon representing the second consumer electronic media device.

5           At step 810, the proxy device receives the request signal and then transmits an icon representing the second consumer electronic media device to the third consumer electronic media device. At step 812, the third consumer electronic media device receives the icon from the proxy device and then displays it on its monitor. Process 800 is exited at step 814.

10

Figure 9 is a flowchart illustrating steps of a process 900 in accordance with one embodiment of the present invention for enabling a HAVi proxy consumer electronic media device to have more control over non-HAVi consumer electronic media devices within network 5. Furthermore, process 900 also enables communication between  
15   HAVi and non-HAVi consumer electronic media devices. It should be appreciated that communication between HAVi and non-HAVi consumer electronic media devices is typically not possible. As such, the present invention causes the non-HAVi and HAVi consumer electronic media devices to communicate at the lowest common protocol level (e.g., AV/C, etc.) shared by the two devices. The non-HAVi and HAVi consumer  
20   electronic media devices are able to communicate at a common protocol level because they have the capability of using the IEEE 1394 serial bus of network 5. Process 900 is realized as program code stored within computer readable memory units of a HAVi proxy consumer electronic media device, a non-HAVi consumer

electronic media device, and a legacy (pre-HAVi) consumer electronic media device of network 5.

Process 900 of Figure 9 begins at step 902 and at step 904, the HAVi proxy  
5 device (e.g., set-top-box 13) establishes itself as a proxy for a legacy consumer  
electronic media device (e.g., VCR 12), which is only able to receive low level AV/C  
commands signals. It should be appreciated that one method of accomplishing step  
904 in accordance with the present invention is to utilize process 500 of Figure 5.  
Furthermore, another method of accomplishing step 904 in accordance with the  
10 present invention is to utilize any of the methods described above.

At step 906, a non-HAVi consumer electronic media device (e.g., PC 14)  
discovers that the HAVi proxy device is a proxy for the legacy consumer electronic  
media device. This process utilizes well known IEEE 1212 communication protocol  
15 mechanisms along with methods of the present invention described above. It should  
be appreciated that the non-HAVi consumer electronic media device understands the  
functionality of the HAVi proxy device in accordance with the present invention. At  
step 908, the non-HAVi consumer electronic media device transmits a low-level AV/C  
command signal to the proxy device using the IEEE 1212 communication protocol. At  
20 step 910, the HAVi proxy device receives the low level AV/C command signal and then  
transmits it to the legacy device.

At step 912 of Figure 9, the legacy consumer electronic media device receives the low level AV/C command signal from the HAVi proxy device and then performs the desired function. At step 914, the HAVi proxy device returns information/results to the non-HAVi device with regard to the issued command. At step 916, the HAVi proxy  
5 device notifies any other HAVi consumer electronic media devices of network 5 of the activities of the non-HAVi and legacy consumer electronic media devices. In this manner, the other HAVi consumer electronic media devices are updated on the status of the non-HAVi and legacy consumer electronic media devices. As such, the HAVi and non-HAVi consumer electronic media devices are able to operate in conjunction.  
10 Process 900 is exited at step 918.

Figure 10 is a flowchart illustrating steps of a process 1000 implemented in accordance with one embodiment of the proxy arbitration functionality of the present invention. Specifically, process 1000 enables a proxy consumer electronic media  
15 device to arbitrate access to a second consumer electronic media device. One possible reason for performing this function is that the second consumer electronic media device is not equipped to receive more than one command at a time. Process 1000 is realized as program code stored within computer readable memory units of a proxy consumer electronic media device, a second, third and fourth consumer  
20 electronic media devices of network 5. Process 1000 begins at step 1002 and at step 1004, the proxy device (e.g., set-top-box 13) establishes itself as a proxy arbitrator for a second consumer electronic media device (e.g., VCR 12). It should be appreciated that one method of accomplishing step 1004 in accordance with the present invention

is to utilize process 500 of Figure 5. Furthermore, another method of accomplishing step 1004 in accordance with the present invention is to utilize any of the methods described above.

5           At step 1006, a third and fourth consumer electronic media devices (e.g., video camera 10 and PC 14) each discovers that the proxy device is a proxy arbitrator for the second consumer electronic media device. This process utilizes well known IEEE 1212 communication protocol mechanisms along with methods of the present invention described above. It should be appreciated that the third and fourth consumer  
10   electronic media devices understand the functionality of the proxy device in accordance with the present invention. At step 1008, the third and fourth consumer electronic media devices each transmit a command signal to the proxy device at about the same time. It should be appreciated that the command signals at step 1008 are only used as examples to illustrate the operation of process 1000. As such, the third  
15   and fourth consumer electronic media device, in accordance with the present invention, are both able to transmit any type of signal to the proxy device.

          At step 1010 of Figure 10, the proxy device determines which command signal will be transmitted first to the second consumer electronic media device. It should be  
20   appreciated that step 1010 can be accomplished by the proxy device in many different ways, in accordance with the present invention. For instance, the proxy device can accomplish step 1010 by utilizing the temporary node IDs of the third and fourth consumer electronic media devices. At step 1012, the proxy device transmits

command signal of the third consumer electronic media device to the second consumer electronic media device.

At step 1014, the proxy device stores the command signal of the fourth  
5 consumer electronic media device within its memory unit in order to transmit it at a later time to the second consumer electronic media device. At step 1016, the second consumer electronic media device receives the command signal of the third consumer electronic media device from the proxy device and then performs the corresponding function. At step 1018, the proxy device transmits the command signal of the fourth  
10 consumer electronic media device to the second consumer electronic media device. At step 1020, the second consumer electronic media device receives the command signal of the fourth consumer electronic media device from the proxy device and then performs the corresponding function. At step 1022, the proxy device returns information/results to the third and fourth devices with regard to their respective issued  
15 commands. Process 1000 is exited at step 1024.

Along with the wide variety of proxy services that a proxy device can provide in accordance with the present invention, the proxy device is also able to be established as a proxy for only a particular part or functional subunit of a consumer electronic  
20 media device. For instance, the proxy device can establish itself as a proxy for only the tuner functionality of the VCR 12. In this manner, the proxy device in accordance with the present invention has the ability to provide very specific functionality for other consumer electronic media devices of network 5.

Figure 11 is a flowchart illustrating steps of a process 1100 in accordance with one embodiment of the present invention for enabling a proxy consumer electronic media device to be a proxy for a specific functional subunit of a second consumer electronic media device within network 5. Process 1100 is realized as program code stored within computer readable memory units of a proxy consumer electronic media device, a second and third consumer electronic media devices of network 5. Process 1100 begins at step 1102 and at step 1104, the proxy device (e.g., set-top-box 13) establishes itself as a proxy for a second consumer electronic media device (e.g., VCR 12). It should be appreciated that one method of accomplishing step 1104 in accordance with the present invention is to utilize process 500 of Figure 5. Furthermore, another method of accomplishing step 1104 in accordance with the present invention is to utilize any of the methods described above.

At step 1106, the proxy device transmits a RESERVE command, which is part of the AV/C protocol, to the second consumer electronic media device in order to exclude other consumer electronic media devices from controlling it. At step 1108, a third consumer electronic media device (e.g., PC 14) discovers that the proxy device is a proxy for the second consumer electronic media device. This process utilizes well known IEEE 1212 communication protocol mechanisms along with methods of the present invention described above. It should be appreciated that the third consumer electronic media device understands the functionality of the proxy device in accordance with the present invention. At step 1110, the third consumer electronic

media device transmits a request signal to the proxy device to reserve a particular functional subunit of the second consumer electronic media device.

At step 1112 of Figure 11, the proxy device receives the request signal from the  
5 third consumer electronic media device. At step 1114, the proxy device determines  
whether that particular functional subunit of the second consumer electronic media  
device has already be reserved by another consumer electronic media device of  
network 5. At step 1114, if the subunit has already been reserved, process 1100  
proceeds to step 1122. If the subunit has not been reserved, process 1100 proceeds  
10 to step 1116.

At step 1116, the proxy device reserves the requested subunit of the second  
consumer electronic media device for the third consumer electronic media device. As  
such, the third consumer electronic media device has exclusive control over that  
15 particular functional subunit of the second consumer electronic media device through  
the proxy device. At step 1118, the proxy device transmits an acknowledge signal to  
the third consumer electronic media device. At step 1120, the third consumer  
electronic media device receives the acknowledge signal from the proxy signal.

At step 1122 of Figure 11, the proxy device transmits a rejection signal to the  
20 third consumer electronic media device indicating that the requested reservation of the  
particular subunit of the second consumer electronic media device cannot be  
performed at that time. At step 1124, the third consumer electronic media device

receives the rejection signal from the proxy device. Process 1100 is exited at step 1126.

The present invention provides many different advantages to a network of consumer electronic media devices coupled together by the IEEE 1394 serial communication standard, thereby improving the overall experience to the user. For instance, the proxy device in accordance with the present invention has the capability of acting as a translator between two consumer electronic media devices. As such, consumer electronic media devices that were previously unable to communicate are now able to communicate. Furthermore, the proxy device enables HAVi consumer electronic media devices to have greater control over non-HAVi consumer electronic media devices. Additionally, the proxy device enables communication between HAVi and non-HAVi consumer electronic media devices. Another advantage provided by the present invention is that the proxy device can extend existing functionality of consumer electronic media devices. As such, existing devices are improved when used in conjunction with a proxy device in accordance with the present invention.

Another advantage provided by the present invention is that the proxy device can provide new functionality to consumer electronic media devices. Therefore, devices which previously could only provide its user limited functionality are now able to provide much more functionality when used in conjunction with the proxy device in accordance with the present invention. Furthermore, the proxy device can act as an access arbitrator for consumer electronic media devices. For instance, an older VCR



may not be equipped to receive command signals from more than one device at a time. As such, a proxy device, in accordance with the present invention, can be established as an access arbitrator or gatekeeper whose function is to only allow one command signal to be sent to the VCR at a time. Another advantage provided by the present invention is that the proxy device can act as a proxy for all or a portion of the functionality of a consumer electronic media device. It should be appreciated that these are only a few of the advantageous proxy services that the proxy device can provide for other consumer electronic media devices, in accordance with the present invention.

10

The foregoing descriptions of specific embodiments of the present invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, and obviously many modifications and variations are possible in light of the above teaching. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the Claims appended hereto and their equivalents.

20

CLAIMS

5 What is claimed is:

1. A method of communicating between a plurality of consumer electronic media devices, said method comprising the steps of:

a) establishing a first consumer electronic media device as a proxy device for a  
10 second consumer electronic media device within said network of consumer electronic media devices, wherein said plurality of consumer electronic media devices are coupled together as a network by a bus, wherein step a) comprises the step of storing a data structure in memory of said first consumer electronic media device, wherein said data structure defines proxy services that said first consumer electronic media device performs for said second consumer  
15 electronic media device;

b) transmitting a signal to said first consumer electronic media device indicating a particular proxy service to be performed;

c) said first consumer electronic media device receiving said signal; and

d) in response to receiving said signal, said first consumer electronic media device  
20 performing said particular proxy service for said second consumer electronic media device.

2. The method as described in Claim 1 further comprising the step of e) said first consumer electronic media device transmitting resultant information to said second consumer electronic media device, said resultant information identified in said signal.

3. The method of Claim 1 or 2 wherein the electronic media devices are in a network of consumer electronic media devices, and the bus is a common bus.

4. The method of Claim 1 wherein the bus of step a) is an IEEE 1394 bus, the method  
5 further comprising the step of:

e) said first consumer electronic media device transmitting resultant information to said second consumer electronic media device, said resultant information identified in said signal.

10 5. A method as described in Claim 1, 3 or 4 wherein said plurality of consumer electronic media devices includes a third consumer electronic media device and wherein said step b) comprises the step of said third consumer electronic media device transmitting said signal and said step d) comprises the step of said first consumer electronic media device transmitting a result signal to said third consumer electronic media device.

15

6. A method as described in Claim 1, 3 or 4 wherein said step a) comprises the steps of:

a1) said first consumer electronic media device discovering said second consumer electronic media device coupled to said IEEE 1394 bus;

20 a2) said first consumer electronic media device determining a functionality of said second consumer electronic media device;

a3) said first consumer electronic media device determining whether said first consumer electronic media device can provide a proxy service for said second consumer electronic media device; and

a4) if said first consumer electronic media device can provide a proxy service for said second consumer electronic media device, said first consumer electronic media device performing said step of storing said data structure in memory of said first consumer electronic media device.

5

7. A method as described in Claim 1, 3 or 4 wherein said step a) comprises the steps of:

a1) a third consumer electronic media device examining said memory of said first consumer electronic media device to determine that said first consumer electronic media device is said proxy device for said second consumer electronic media device; and

10

a2) said third consumer electronic media device recording this information within its memory.

15

8. A method as described in Claim 1, 3 or 4 wherein said step a) comprises the steps of:

a1) a third consumer electronic media device examining said memory of said first consumer electronic media device utilizing an IEEE 1212 read only memory (ROM) protocol to determine that said first consumer electronic media device is said proxy device for said second consumer electronic media device; and

20

a2) said third consumer electronic media device recording this information within its memory.

9. A method as described in Claim 1, 3 or 4 wherein said particular proxy service involves said first consumer electronic media device performing a translation on

communications between said second consumer electronic media device and a third consumer electronic media device.

10. A method as described in Claim 1, 3 or 4 wherein said particular proxy service  
5 involves said first consumer electronic media device providing a new functionality for said second consumer electronic media device.

11. A method as described in Claim 1, 3 or 4 wherein said particular proxy service  
involves said first consumer electronic media device extending an existing functionality of  
10 said second consumer electronic media device.

12. A method as described in Claim 1, 3 or 4 wherein said particular proxy service  
involves said first consumer electronic media device arbitrating access to said second  
consumer electronic media device.

15

13. A method as described in Claim 1, 3 or 4 wherein said particular proxy service  
involves said first consumer electronic media device enabling Home Audio Video  
Interoperability (HAVi) devices to have control over non-HAVi devices.

20

14. A method as described in Claim 1, 3 or 4 wherein said particular proxy service  
involves said first consumer electronic media device enabling non-Home Audio Video  
Interoperability (HAVi) devices to have control over HAVi devices.

15. A method as described in Claim 1, 3 or 4 wherein said particular proxy service involves said first consumer electronic media device controlling one subunit of functionality of said second consumer electronic media device.

5 16. A method as described in Claim 1, 3 or 4 wherein said particular proxy service involves said first consumer electronic media device providing a data library for said second consumer electronic media device.

10 17. A communication network comprising:  
a plurality of consumer electronic media devices;  
an IEEE 1394 communication bus coupled to each of said plurality of consumer electronic media devices; and  
a data structure stored within a memory space of a first consumer electronic media device, said data structure containing information defining proxy services to be performed by  
15 said first consumer electronic media device for a second consumer electronic media device, said proxy services for causing said first consumer electronic media device to perform a selected proxy service for said second consumer electronic media device in response to signals received over said IEEE 1394 communication bus that indicate said selected proxy service to be performed.

20

18. A network as described in Claim 17 wherein said memory space is a configuration read only memory (ROM) of said first consumer electronic media device.

19. A network as described in Claim 17 wherein said selected proxy service  
25 involves said first consumer electronic media device performing translations of

communications between a third consumer electronic media device and said second consumer electronic media device.

20. A network as described in Claim 17 wherein said selected proxy service  
5 involves said first consumer electronic media device providing a new functionality for said second consumer electronic media device.

21. A network as described in Claim 17 wherein said selected proxy service  
involves said first consumer electronic media device extending an existing functionality of  
10 said second consumer electronic media device.

22. A network as described in Claim 17 wherein said selected proxy service  
involves said first consumer electronic media device arbitrating access to said second  
consumer electronic media device between said plurality of consumer electronic media  
15 devices.

23. A network as described in Claim 17 wherein said selected proxy service  
involves said first consumer electronic media device enabling Home Audio Video  
Interoperability (HAVi) devices to have control over non-HAVi devices.  
20


24. A network as described in Claim 17 wherein said selected proxy service  
involves said first consumer electronic media device enabling non-Home Audio Video  
Interoperability (HAVi) devices to have control over HAVi devices.

25. A network as described in Claim 17 wherein said second consumer electronic media device contains several subunits and wherein said selected proxy service involves said first consumer electronic media device controlling one subunit of said second consumer electronic media device.

5

26. A network as described in Claim 17 wherein said selected proxy service involves said first consumer electronic media device providing a data library for said second consumer electronic media device.

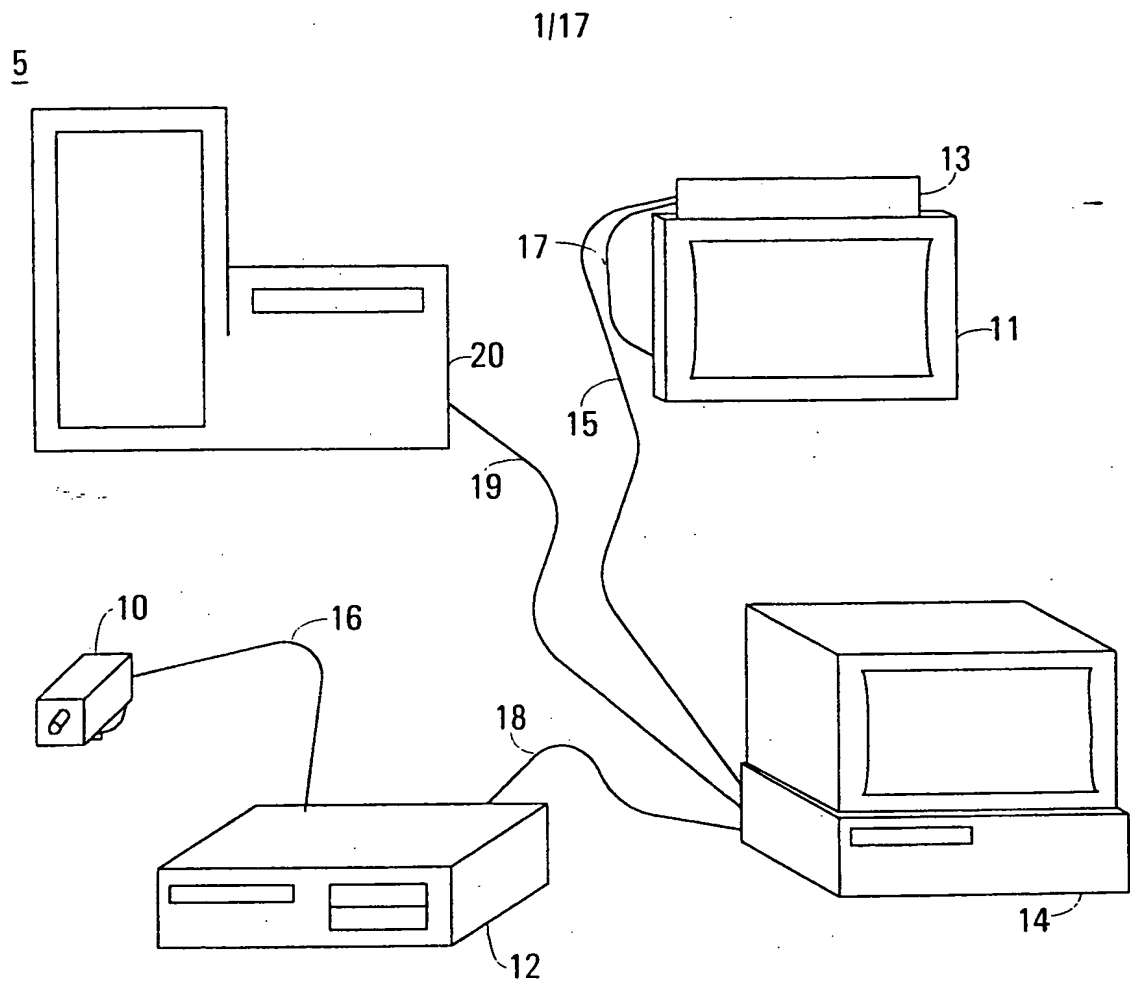

**FIGURE 1**

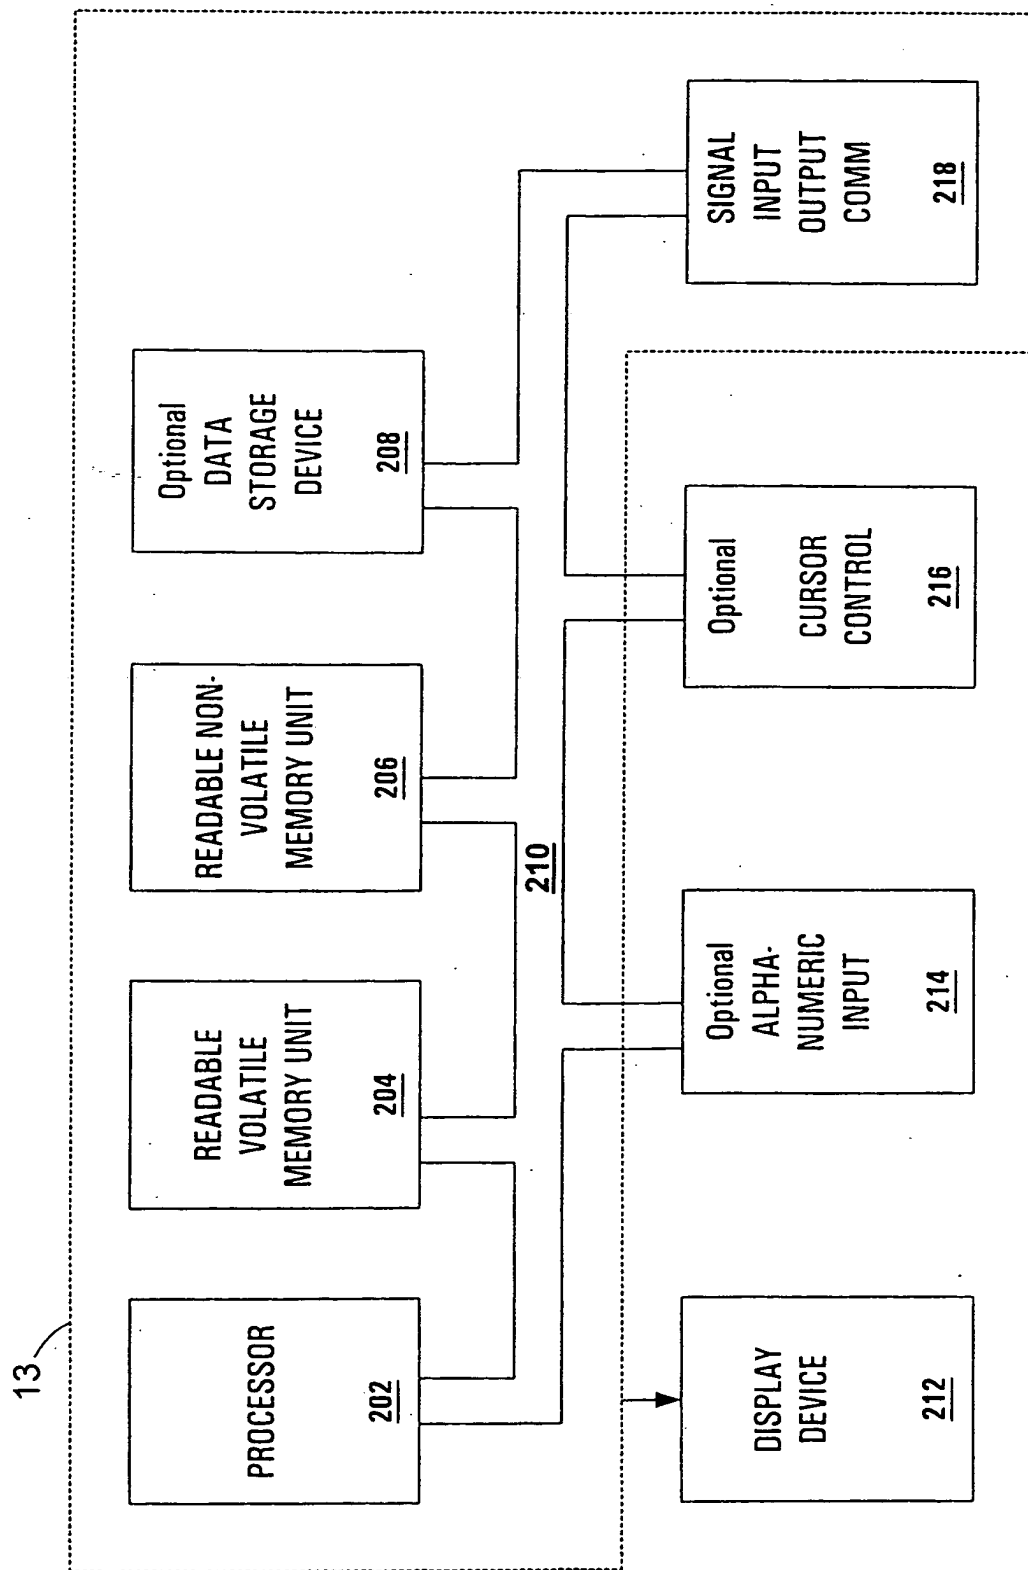
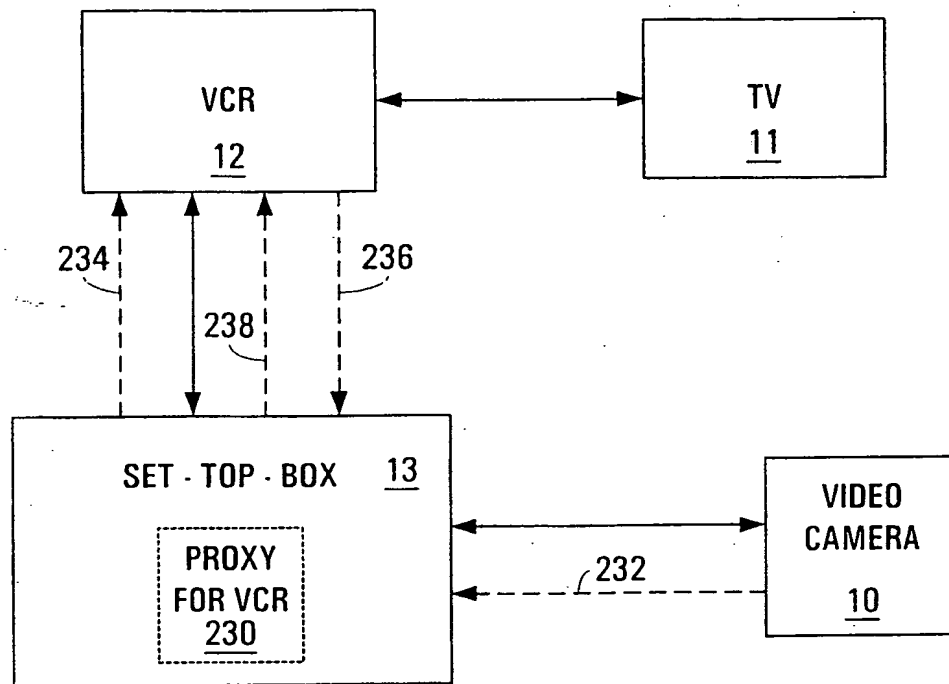
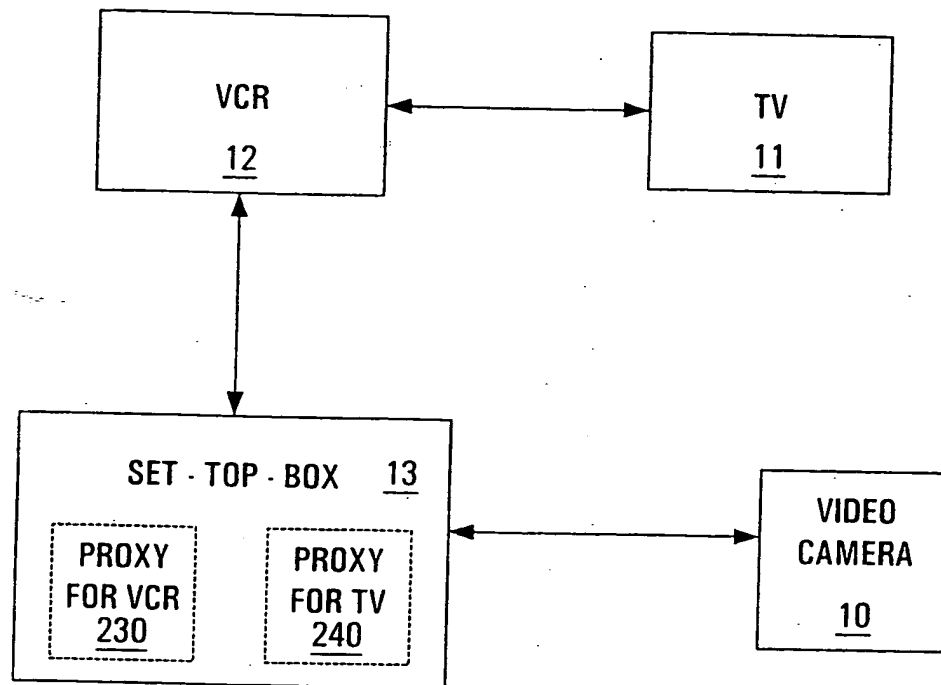


FIGURE 2A


3/17

**FIGURE 2B**


4/17

**FIGURE 2C**

5/17

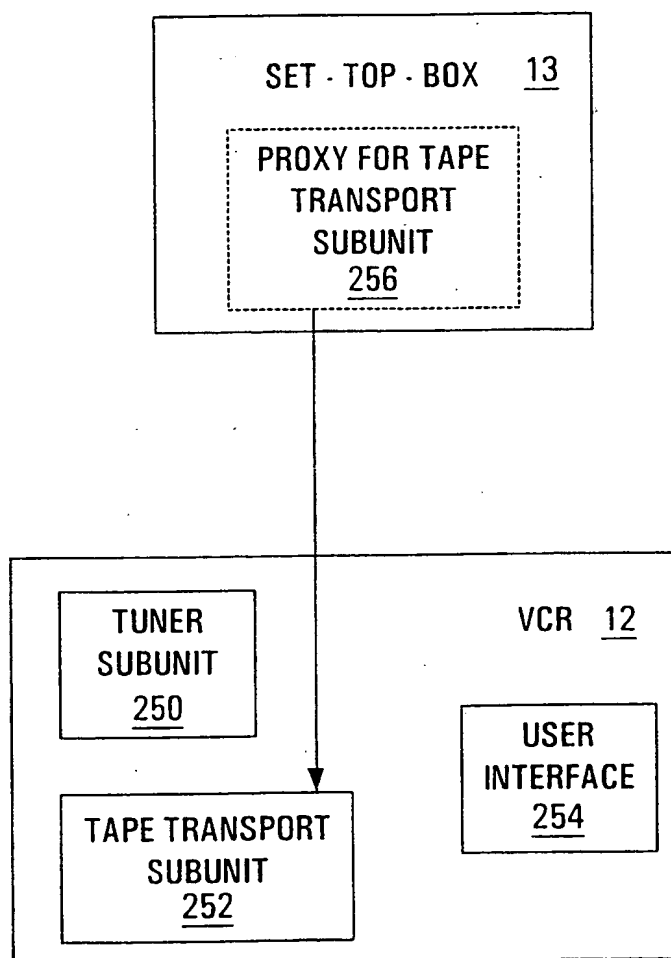
**FIGURE 2D**

6/17

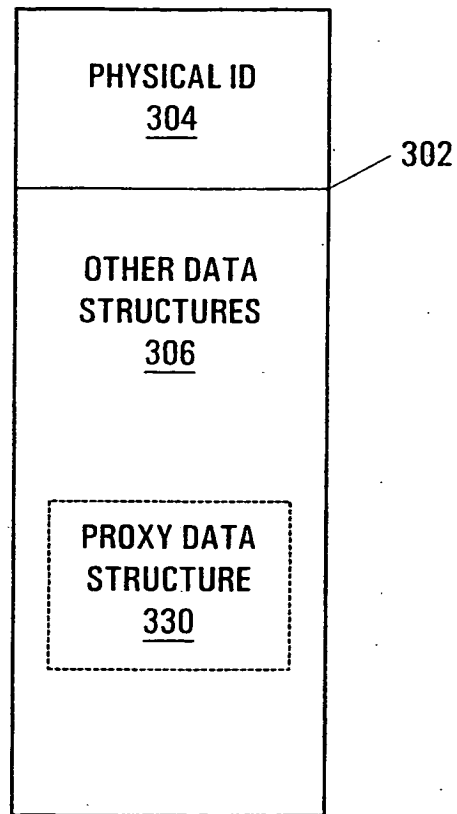


**FIGURE 3A**

7/17

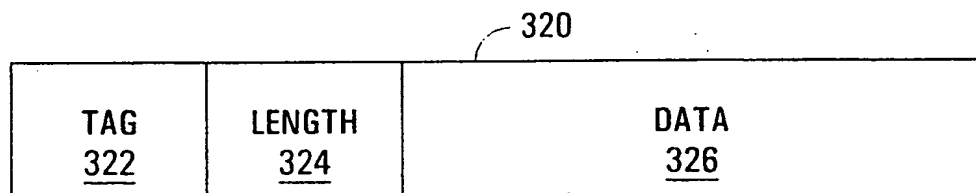

**FIGURE 3B**

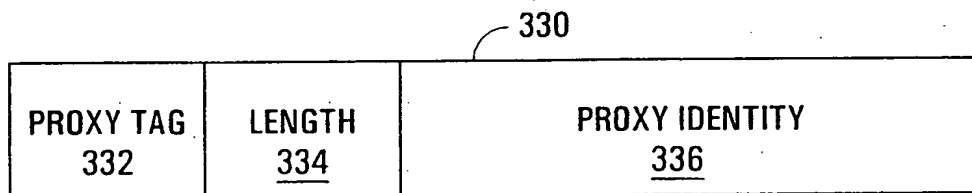

**FIGURE 3C**

8/17


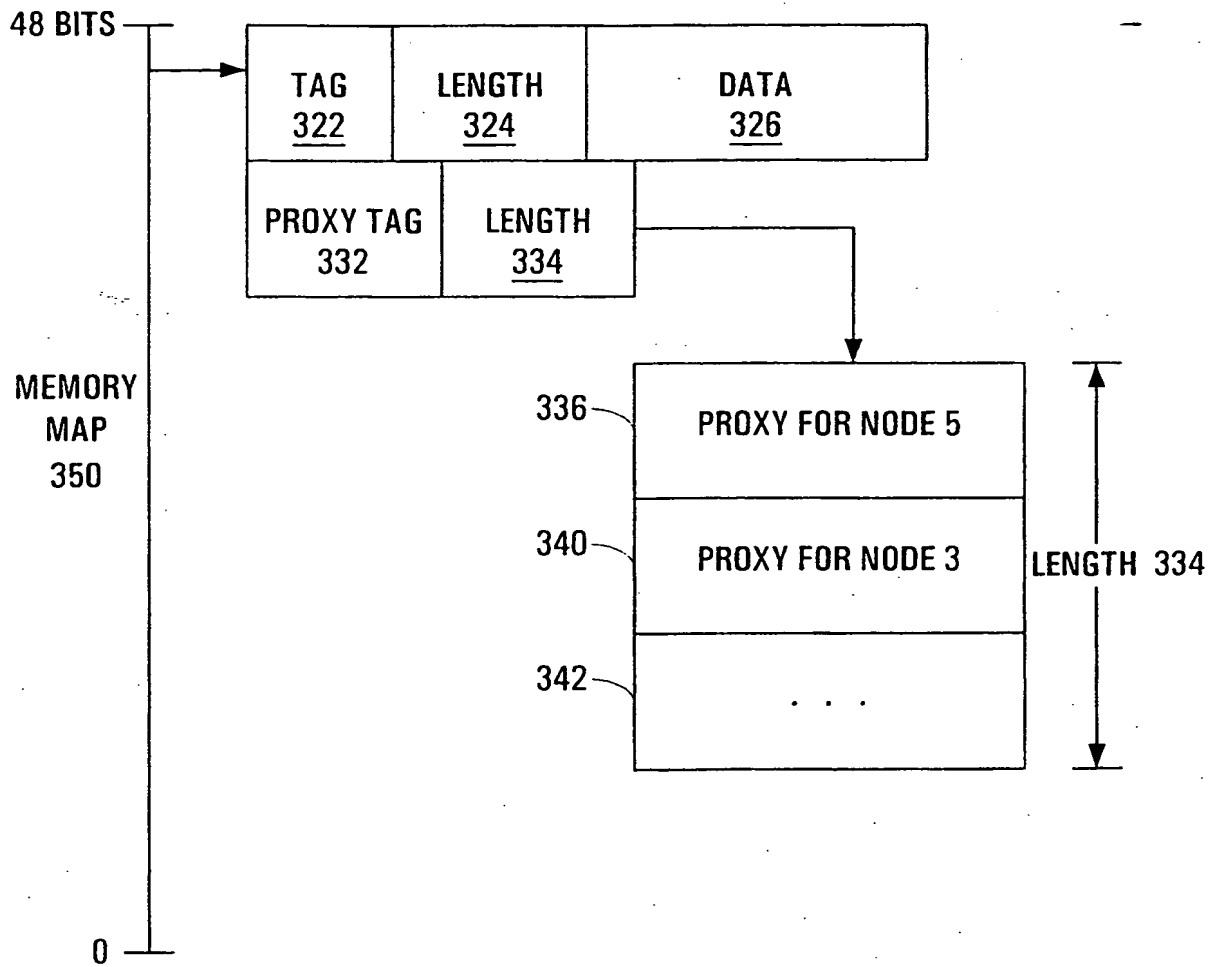



FIGURE 3D

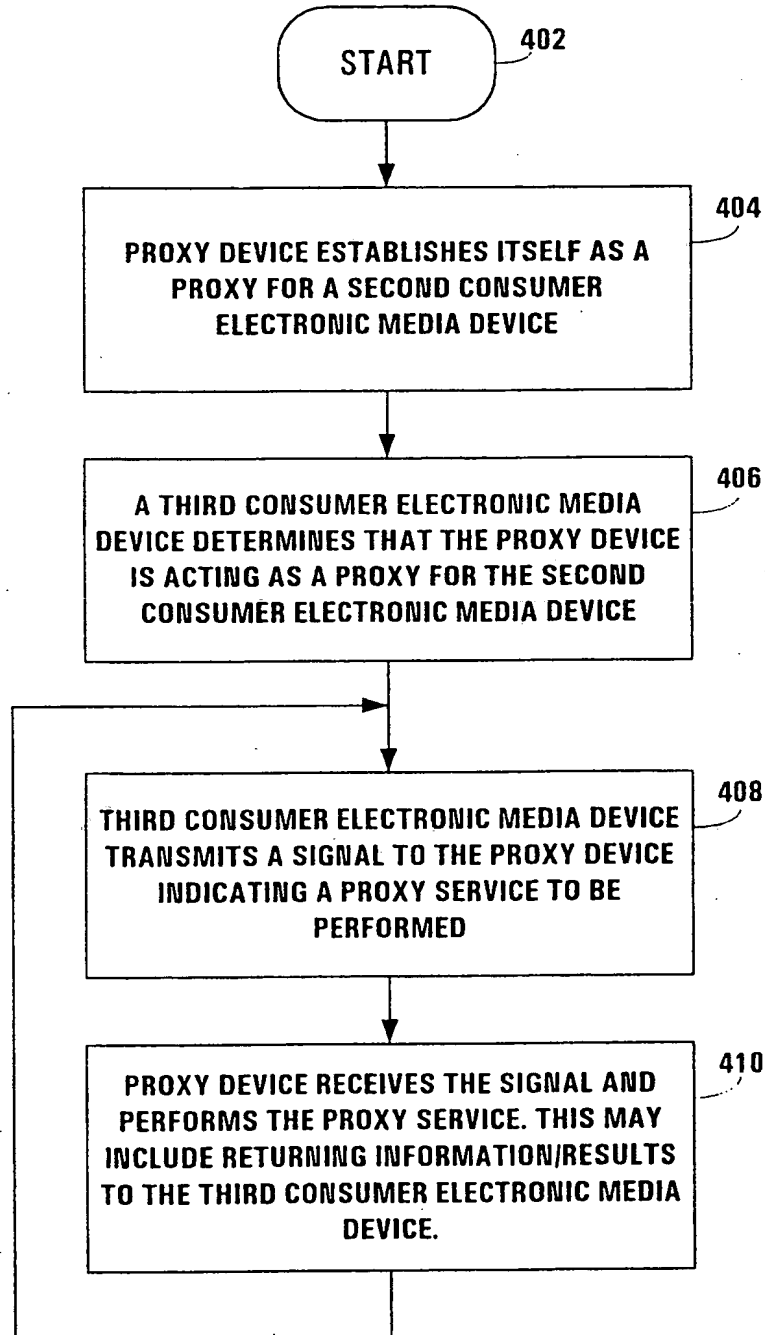


9/17


400**FIGURE 4A**

10/17

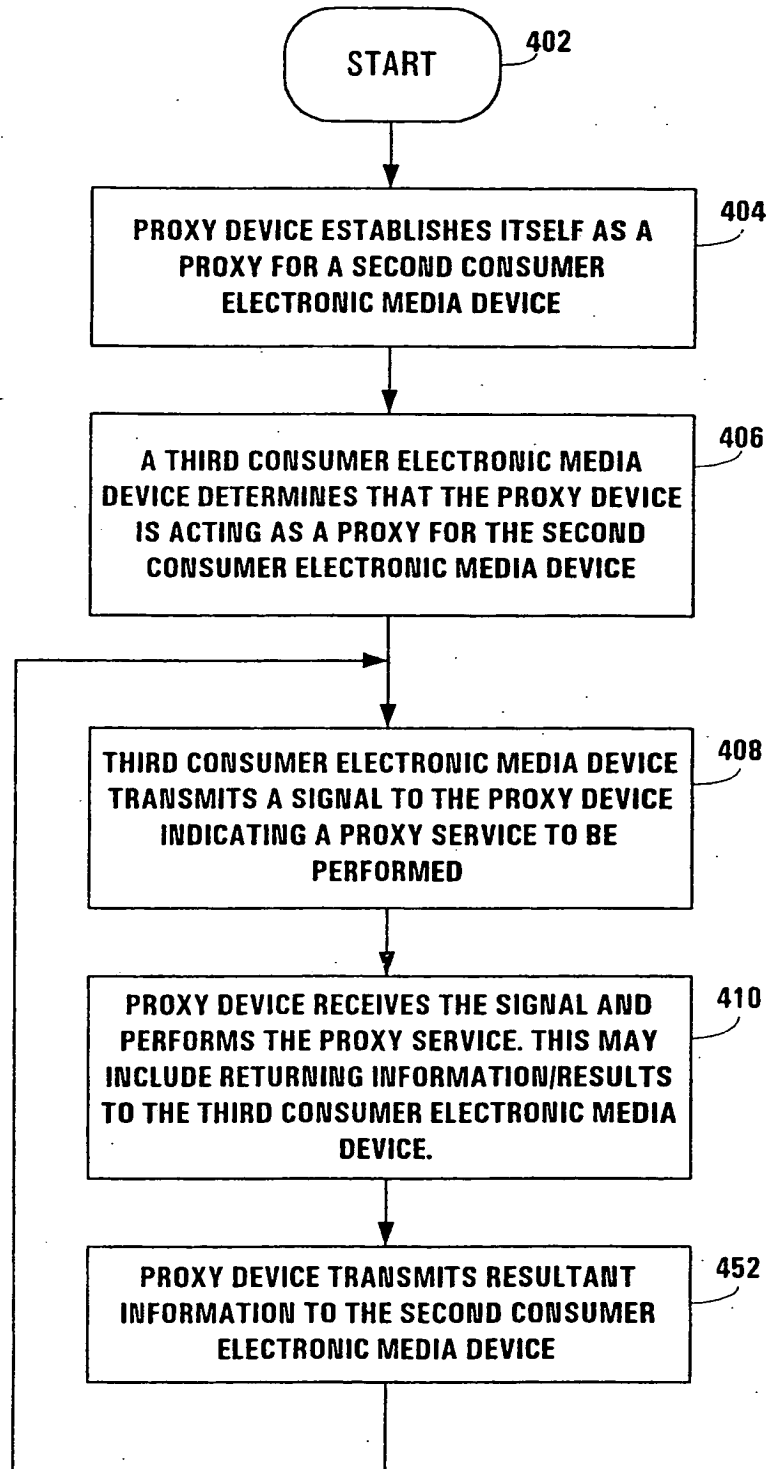450**FIGURE 4B**

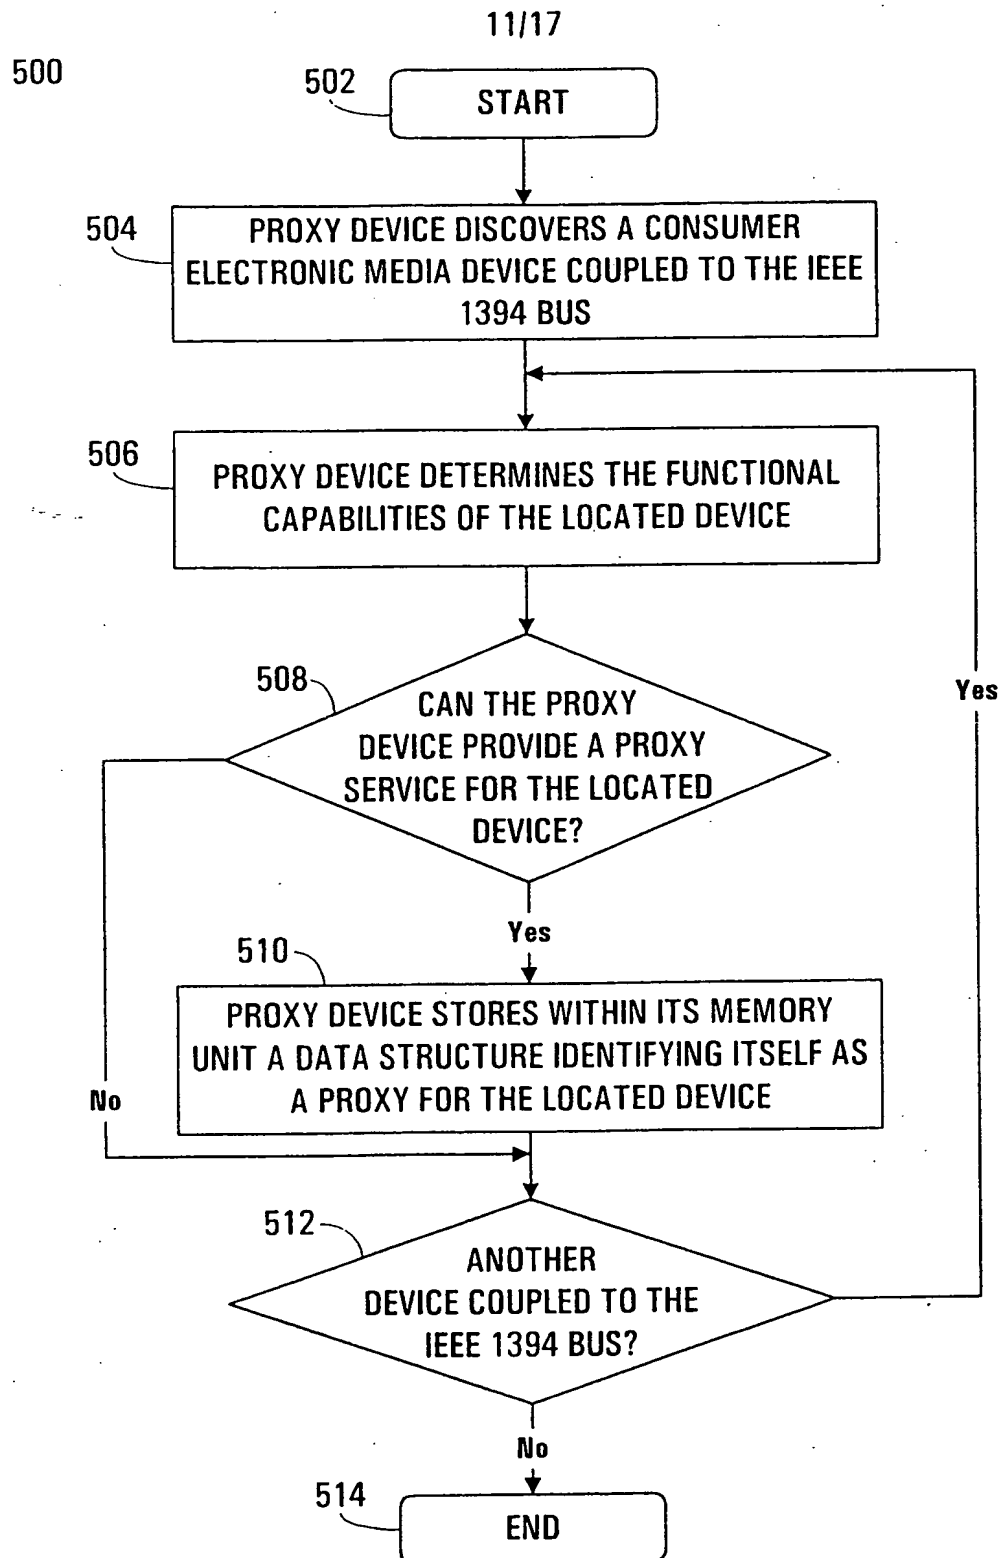
**FIGURE 5**

SUBSTITUTE SHEET (RULE 26)

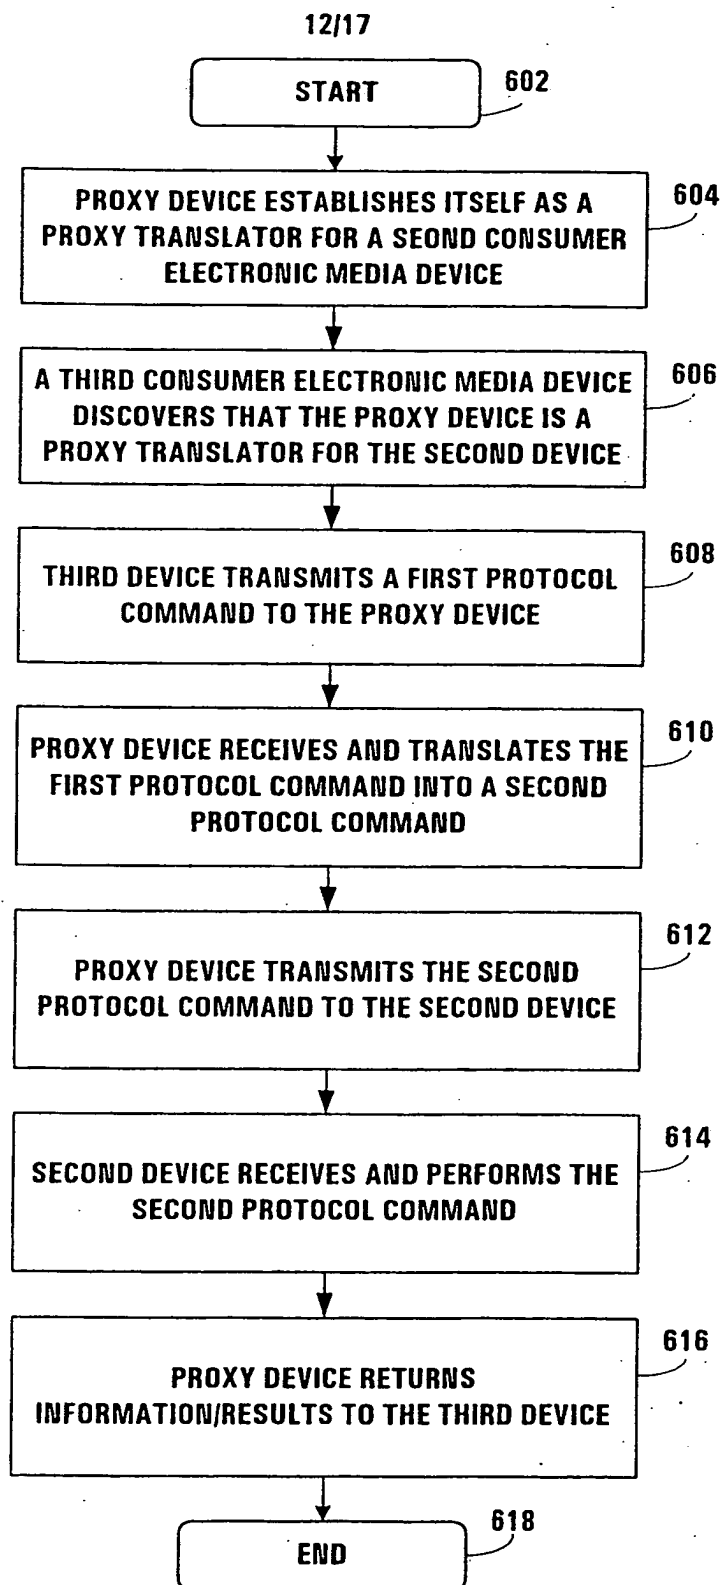600**FIGURE 6**

700


13/17

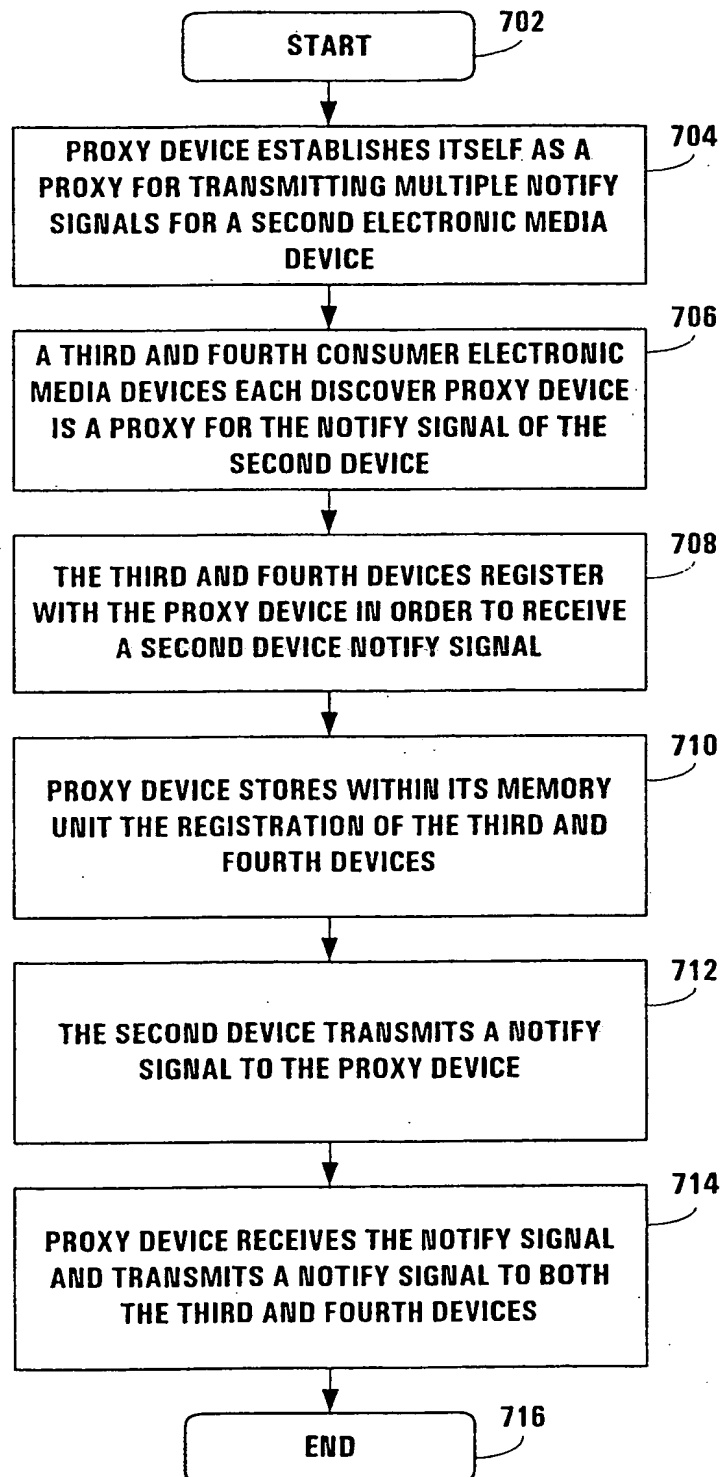
**FIGURE 7**

SUBSTITUTE SHEET (RULE 26)

800

14/17

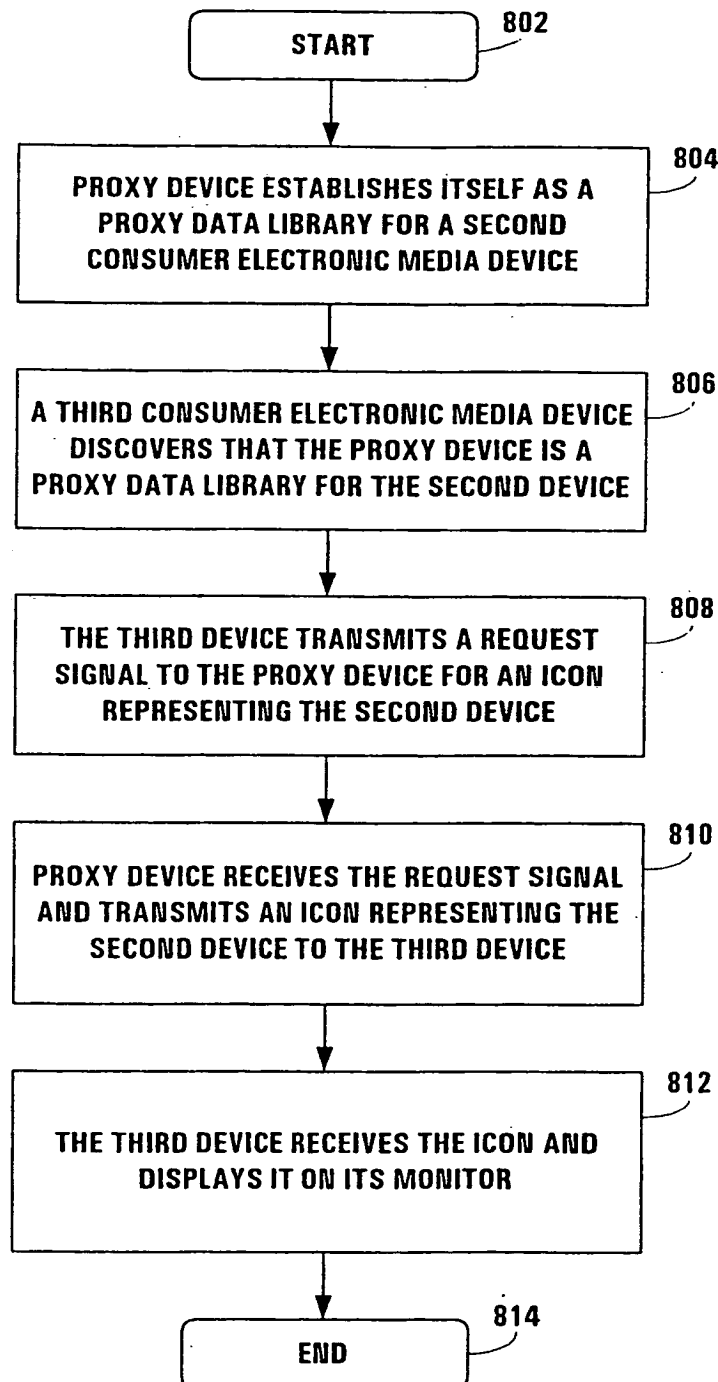**FIGURE 8**

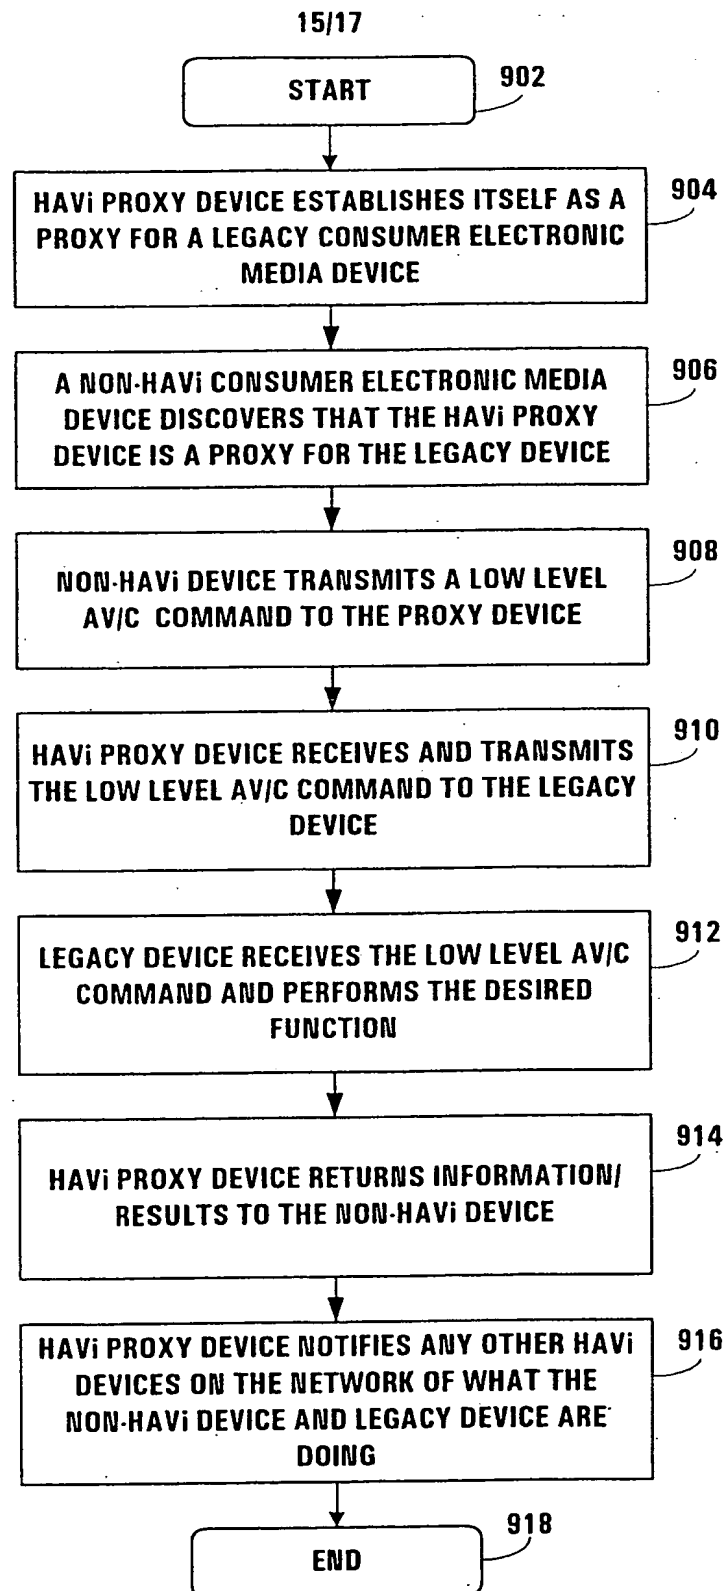900**FIGURE 9**

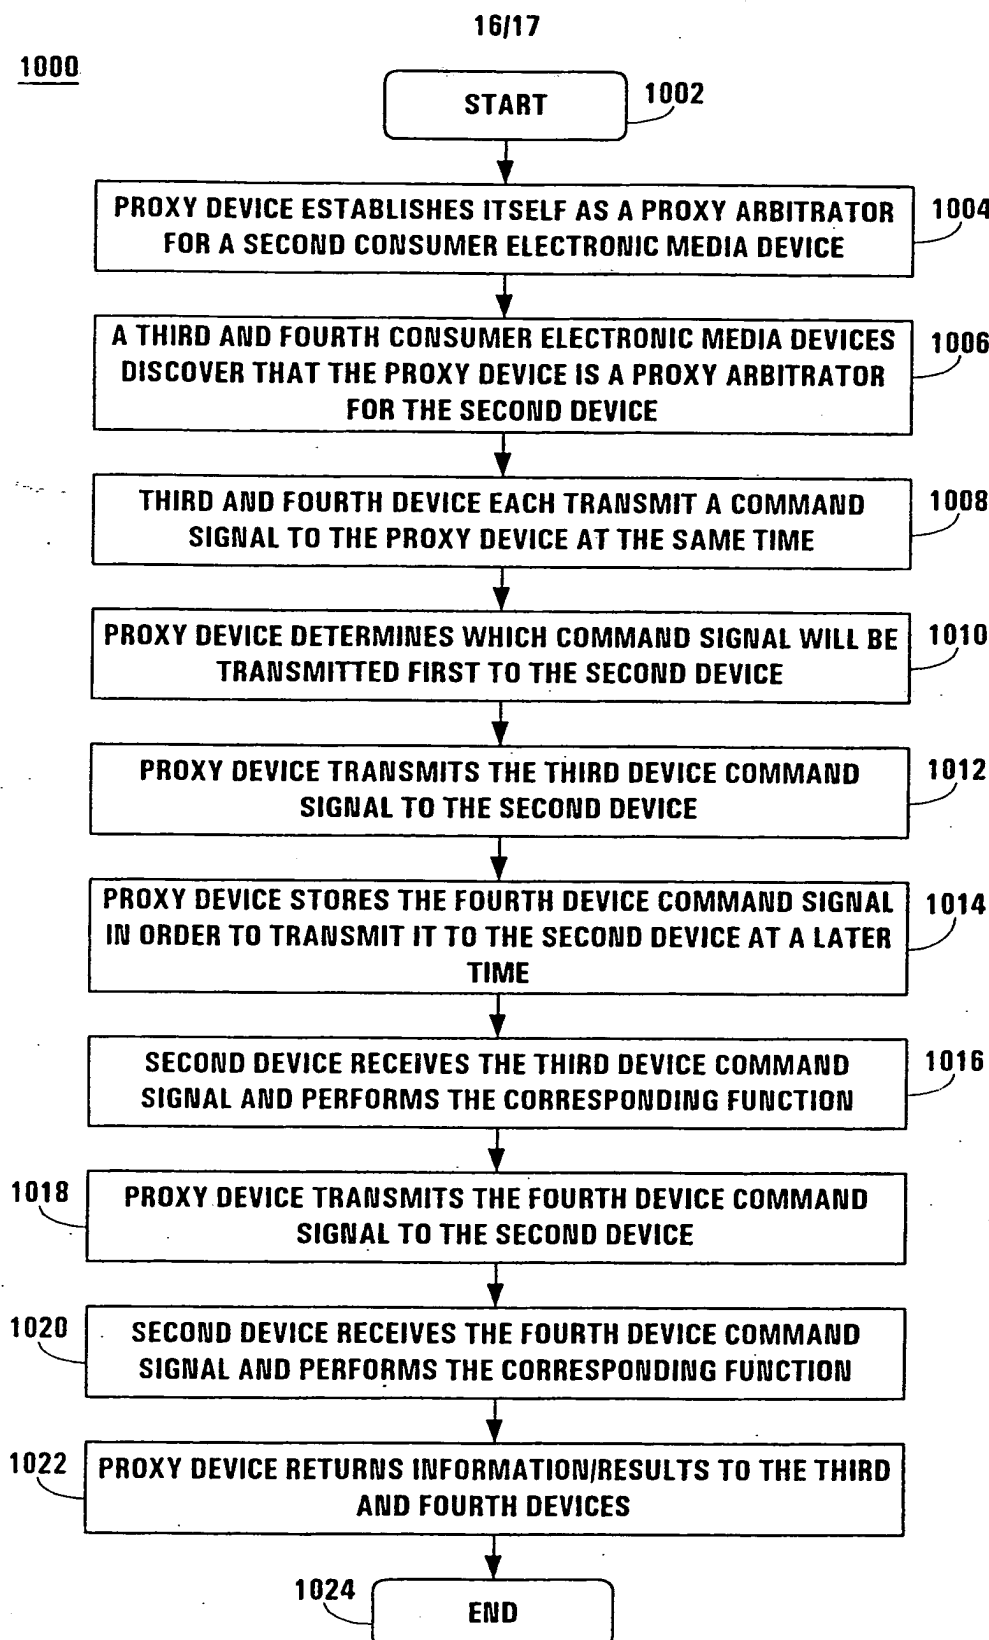


FIGURE 10



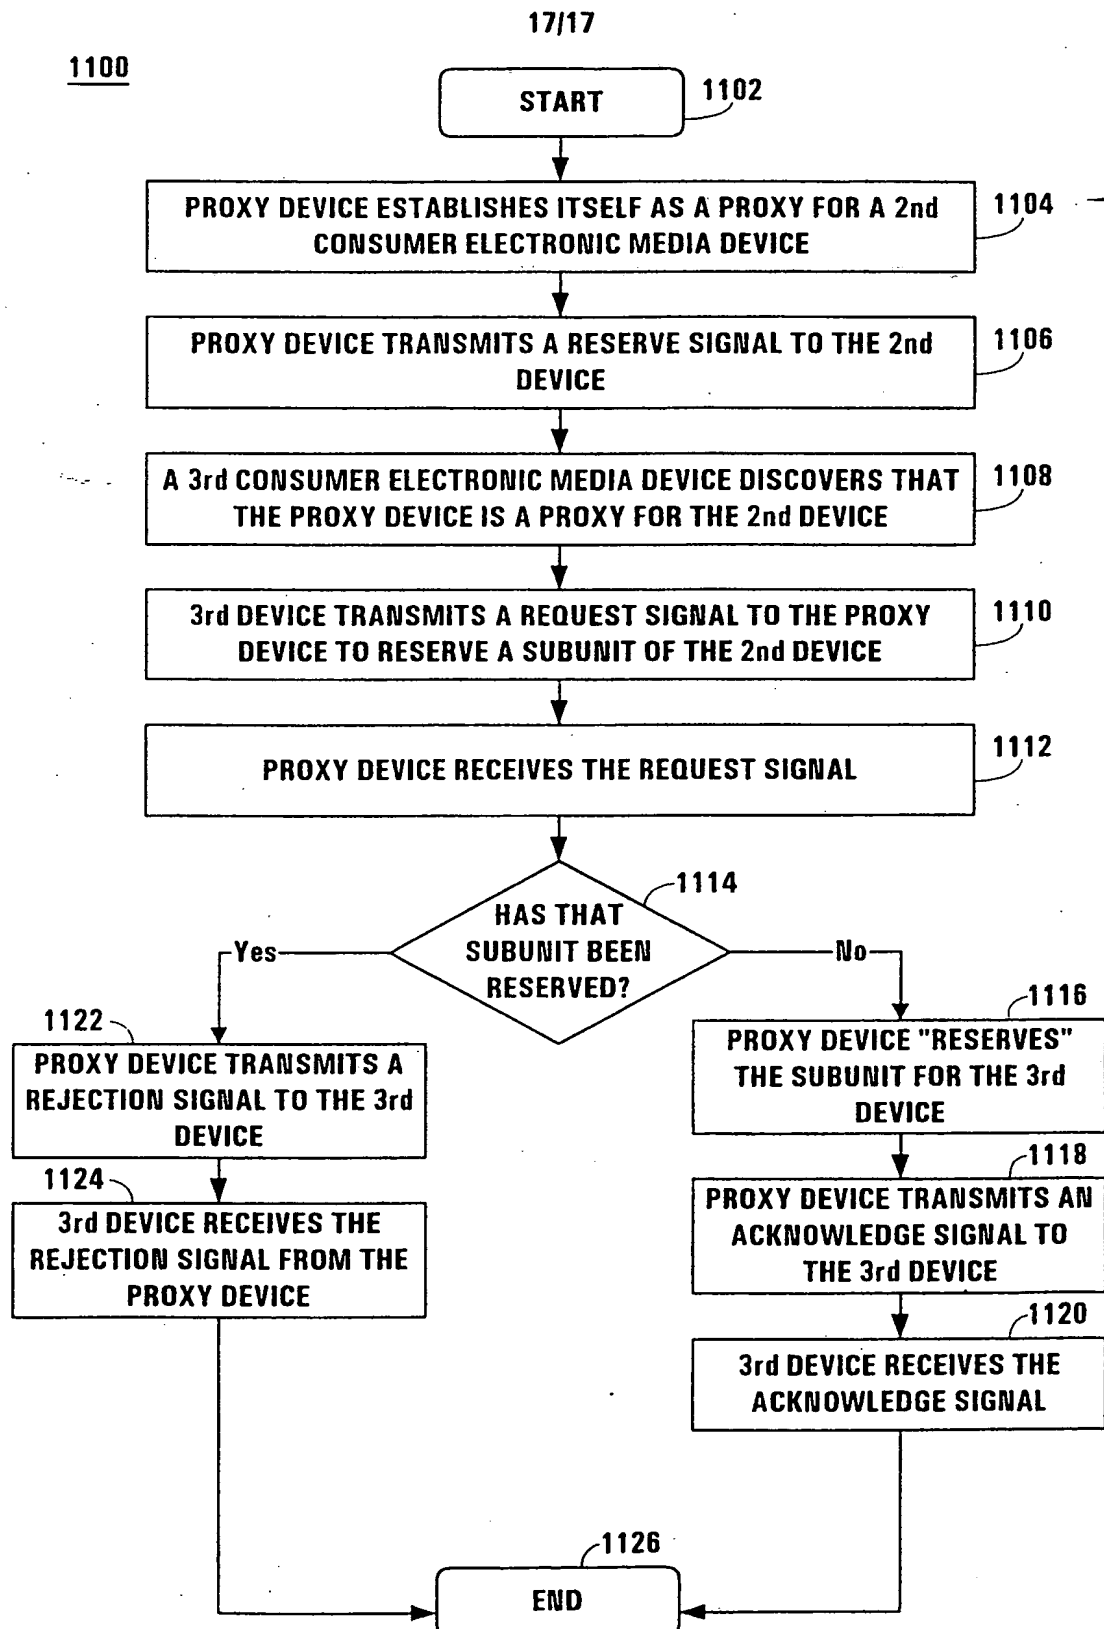


FIGURE 11

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/19138

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04L29/06 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JASON KRAUSE: "What the Hell is...Jini?" THE INDUSTRY STANDARD, 'Online! XP002125806 Retrieved from the Internet: <URL:http://www.thestandard.com/article/display/0,1151,1153,00.html> 'retrieved on 1999-04-23! the whole document	1-26
A	WO 97 37202 A (MICROSOFT CORP) 9 October 1997 (1997-10-09) page 4, line 9 - line 15 claim 17; figures 1,2 --- -/-	1,3,4,6, 7,17,18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

16 December 1999

Date of mailing of the international search report

12/01/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Blanco Cardona, P

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/19138

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WRAY S ET AL: "NETWORKED MULTIMEDIA: THE MEDUSA ENVIRONMENT"</p> <p>IEEE MULTIMEDIA, US, IEEE COMPUTER SOCIETY, vol. 1, no. 4, page 54-63 XP000484151</p> <p>ISSN: 1070-986X</p> <p>page 54, left-hand column, line 1 - line 9</p> <p>page 61, right-hand column, paragraph 3</p> <p>-page 62, right-hand column, paragraph 1</p> <p style="text-align: center;">---</p>	<p>1,7,12, 15,17, 22,25</p>
P,X	<p>WO 99 35856 A (SONY ELECTRONICS INC)</p> <p>15 July 1999 (1999-07-15)</p> <p>abstract</p> <p>page 21, line 21 -page 22, line 24</p> <p>page 23, line 9 -page 25, line 4</p> <p>page 27, line 16 - line 24</p> <p>page 45, line 5 - line 15</p> <p>page 54, line 23 -page 55, line 5</p> <p>page 56, line 1 - line 14</p> <p>page 59, line 19 -page 60, line 7</p> <p>claims 1,4,12</p> <p style="text-align: center;">-----</p>	<p>1-7,9, 12,13, 17-19, 22,23</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/19138

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9737202	A	09-10-1997	US 5787259 A EP 0890086 A	28-07-1998 13-01-1999
WO 9935856	A	15-07-1999	AU 1634299 A	26-07-1999